

CAJUN commander

Technical Notice

aquacraftmodels.com

AQUACRAFT
Models

To keep the Air Cleaner secure on the dummy engine take the following steps:




1. Make sure the battery is disconnected from the Cajun Commander.


2. Remove the propeller from the motor.



3. Remove the dummy engine from the airboat by removing the 2 Phillips screws from the top of the dummy manifold. The dummy engine can be removed from the Cajun Commander through the air rudders of the boat.

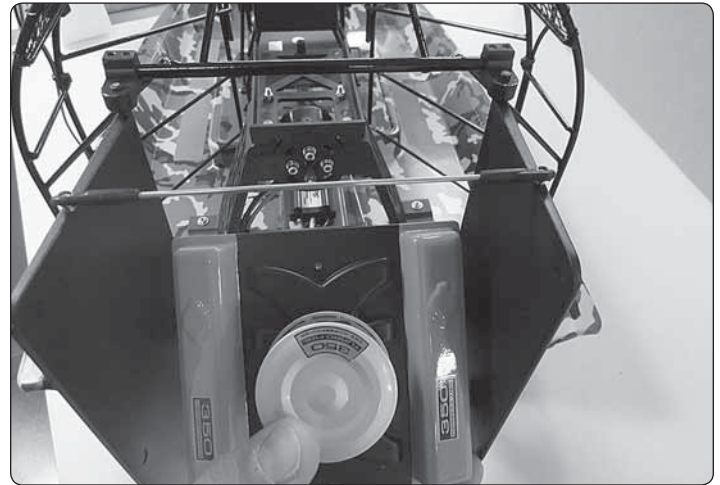

4. Drill a 1/16" hole up through the center of the manifold into the bottom air cleaner. Be careful not to drill through the top of the air cleaner.

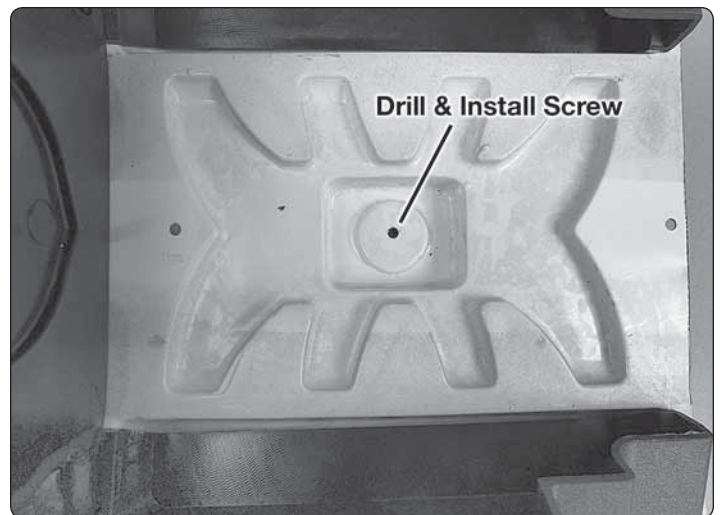

5. Install a #4-1/2" self tapping screw (available at a local hardware store) through the underside of the manifold into the air cleaner. Ensure the air cleaner remains secure to the manifold.

6. Reinstall the dummy engine to the Cajun Commander. Make sure the dummy engine is secure with the 2 Phillips head screws. Re-install the propeller.