

INSTRUCTION MANUAL
AX90036-1001

TRAIL PROVEN OFF-ROAD PERFORMANCE

SCX10

JEEP WRANGLER G6™
FALKEN EDITION

1/10th SCALE ELECTRIC 4WD RTR




 **axial**®

www.axialracing.com

SCX10

CAUTIONS

 To prevent serious personal injury and/or property damage, operate all remotely controlled models in a responsible manner as outlined herein.

CHOOSE THE RIGHT PLACE TO OPERATE YOUR R/C MODEL.

- Do not run on public streets or highways. This could cause serious accidents, personal injuries, and/or property damage.
- Never run R/C models near people or animals.
- To avoid injury, do not run in confined spaces.
- Do not run where loud noises can disturb others, such as hospitals and residential areas.
- Never run indoors. There is a high risk of fire and/or damage.


INSPECT YOUR MODEL BEFORE OPERATION.

- Make sure that all screws and nuts are properly tightened. It is also a good idea to use removable thread lock wherever metal screws go into metal, especially for engine mounts and the engine pilot shaft.
- Always use fresh batteries for your transmitter and for your receiver to avoid losing control of the model.
- Always test the brakes and throttle before starting your engine to avoid losing control of the model.

AFTER OPERATION OF YOUR R/C MODEL

- Turn off receiver first, then turn off transmitter, this will prevent runaways.
- Be careful when handling batteries, they will be hot after running.
- Replace any batteries that have been dented or have frayed wires, short circuits can cause fire.
- Be sure to keep your R/C model clean and free of excess dirt and grease, this will increase the life.

VORSICHT!

 Um Verletzungen an Personen und/oder Sachschäden zu vermeiden, sollten alle ferngesteuerten Modelle sorgfältig und verantwortungsbewusst bedient werden, wie nachfolgend beschrieben.

Wählen Sie den richtigen Platz zum Fahren

- Fahren Sie niemals auf öffentlichen Straßen. Dies könnte Verkehrsunfälle, Personen schäden oder Sachschäden verursachen.
- Fahren Sie niemals in der Nähe von anderen Personen oder Tieren.
- Fahren Sie niemals auf belebten Straßen.
- Fahren Sie nie in der Nähe von Wohnhäusern oder Krankenhäusern. Der Lärm könnte andere Personen stören.
- Fahren Sie niemals in Innenräumen. Dort könnte etwas beschädigt werden.

Überprüfen Sie Ihr Modell, bevor Sie es in Betrieb nehmen.

- Gehen Sie sicher, dass alle Schrauben und Muttern festgezogen sind. Verwenden Sie überall dort Schrauben-Sicherungslack, wo Metallschrauben in ein Metallgewinde greifen, besonders bei den Motorhaltern.
- Um Störungen zu vermeiden, benutzen Sie immer voll geladene Akkus in Ihrem Sender und Empfänger.
- Bevor Sie den Motor starten, sollten Sie immer die Funktion der Bremse und des Gashebels testen.

Nach Betrieb des RC Modells:

- Zuerst den Empfänger abdrehen, dann den Sender abdrehen um unkontrolliertes Durchgehen zu vermeiden.
- Seien Sie vorsichtig mit gebrauchten Akkus, sie können nach dem Gebrauch heiß sein.
- Ersetzen Sie Akkus/Batterien die beschädigt sind oder schadhafte Kabel aufweisen, sie können Kurzschlüsse oder Feuer verursachen.
- Halten Sie Ihr Fahrzeug sauber und entfernen Sie Schmutz und Schmierfett, damit erhöhen Sie die Lebensdauer Ihres Modells.

PRECAUTIONS

 Afin d'éviter toutes blessures corporelles et/ou dommages environnants, veuillez procéder en toute responsabilité comme indiqué ci-dessous

Choisir le lieu adéquat pour faire rouler votre modèle.

- Ne jamais rouler dans les rues ou sur les routes ouvertes au public. Ceci peut provoquer de graves accidents.
- Ne jamais rouler près de personnes ou d'animaux.
- Pour éviter les blessures, ne pas rouler dans des espaces confinés.
- Ne jamais rouler où le bruit peut déranger, comme aux abords des hôpitaux ou des quartiers résidentiels.
- Ne jamais rouler à l'intérieur: les gaz d'échappement sont nocifs.

Controler votre modèle avant chaque utilisation.



- Vérifier que les vis et les écrous sont bien serrés. Il est très fortement conseillé d'utiliser du frein filet pour bloquer les vis qui sont en contact avec du métal et tout particulièrement les vis du moteur.
- Toujours utiliser des batteries bien chargées pour l'émission et la réception.
- Toujours vérifier les freins et la commande des gaz avant de démarrer.

Après l'Opération De Votre Modèle de R/C

- Le virage du récepteur premier, alors virage de l'émetteur, ceci empêchera des fugitifs.
- Faire attention en contrôlant des piles, ils auront chaud après avoir couru.
- Remplacer n'importe quelles piles qui ont été cabossées ou a éraillé des fils, les court-circuits peuvent causer le feu.
- Etre sûr de garder votre modèle de R/C nettoie et libère de terre et la graisse supplémentaires, ceci augmentera la vie.


Included items / Im Baukasten enthalten / Outils inclus dans le kit

Radio control car
Ferngesteuertes Modellauto
Voiture radio-commandée

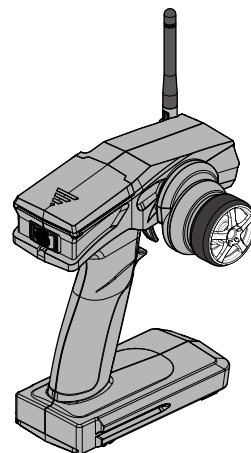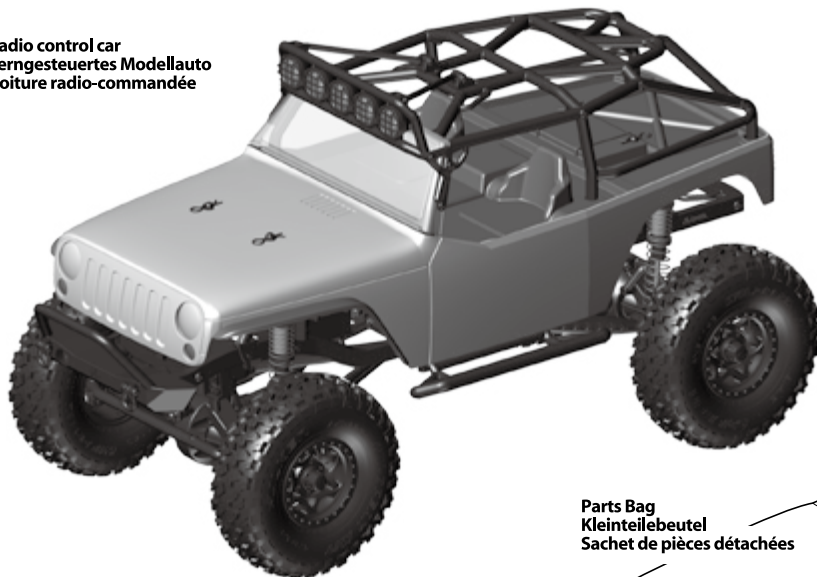


2.4GHz
Transmitter
Sender
Emetteur


Parts Bag
Kleinteilebeutel
Sachet de pièces détachées



Cross wrench
Steckschlüssel
Clé à tube




Equipment needed / Benötigtes Zubehör / Equipement nécessaire




x4

4 AA Alkaline Dry Batteries.
4 St. AA Trockenbatterien.
4 piles type R6 pour votre
radio commande.


Battery
Akku-Pack
Pack de batterie

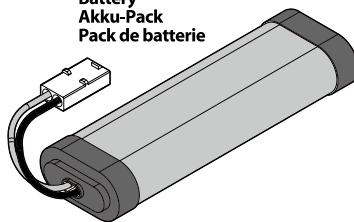




Charger
Ladegerät
Chargeur

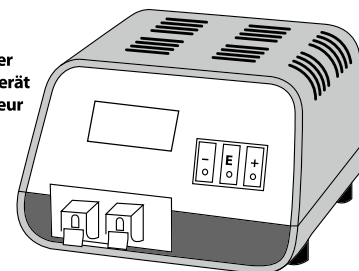


Tools Recommended / Benötigte Werkzeuge / Outillage




Hex wrench
Inbusschlüssel
Clé Allen

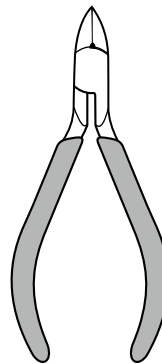

Side cutter
Seitenschneider
Pincers coupantes

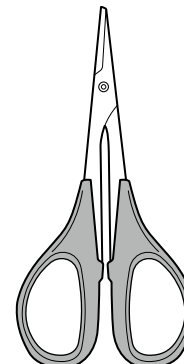


Curved scissors
Schere
Ciseaux

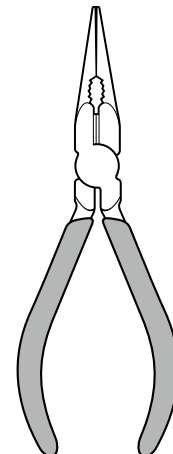


Long nose pliers
Flachzange
Pincers à becs longs

Modeling knife
Modelliermesser
Couteau de modéliste



Charge your battery / Laden des Fahrakkus / Chargement de la batterie

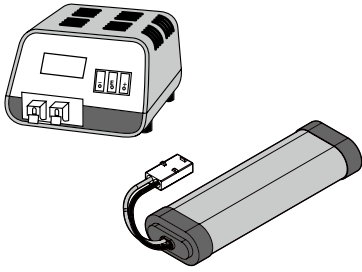

Follow the manufacturer's directions for the charger you purchased to properly charge your batteries.

Folgen Sie den Herstelleranweisungen für den Auflader Ihres gekauften ordentlich, Ihre Batterien zu laden.


Suivre les directions de fabricants pour le chargeur votre a acheté convenablement pour charger vos piles.

Do not use Nickel Cadmium battery charger for Nickel Metal Hydride batteries. If you do not use the special charger for Nickel Metal Hydride batteries, the batteries will be damaged.


Verwenden Sie kein Ladegerät, dass für Nickel Cadmium Akkus gedacht ist, um Nickel Metal Hydrid Akkus zu laden. Wenn Sie kein spezielles Ladegerät für Nickel Metal Hydrid Akkus verwenden, können diese beschädigt werden.

N'utilisez pas de chargeur pour batteries Cadmium-Nickel pour charger des batteries Nickel-Métal Hydride. Si vous n'utilisez pas un chargeur spécial pour des batteries Nickel-Métal Hydride, celles-ci seront endommagées.


1. Removing the Body
Put the battery in the car.

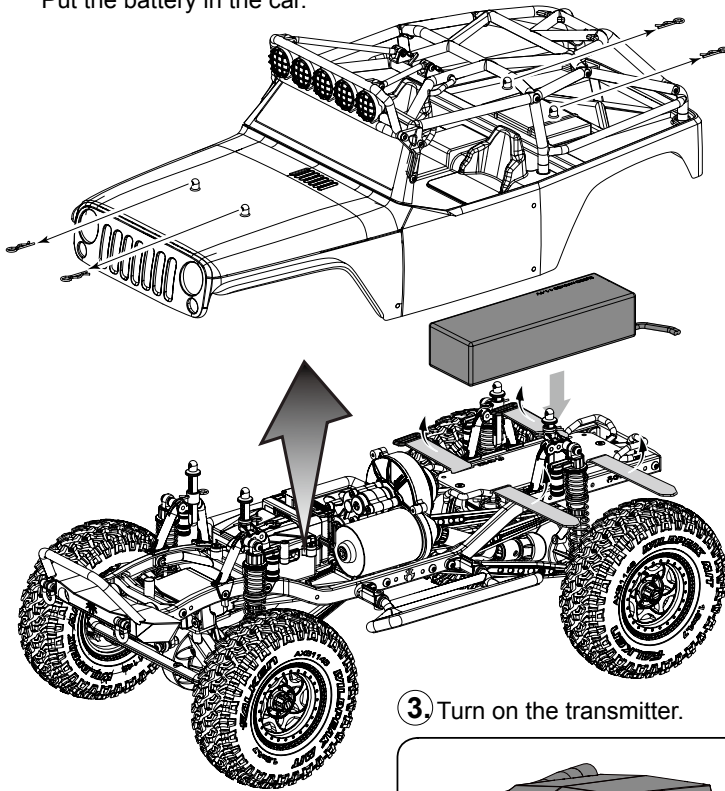



2. Install the battery
Put back the Body.

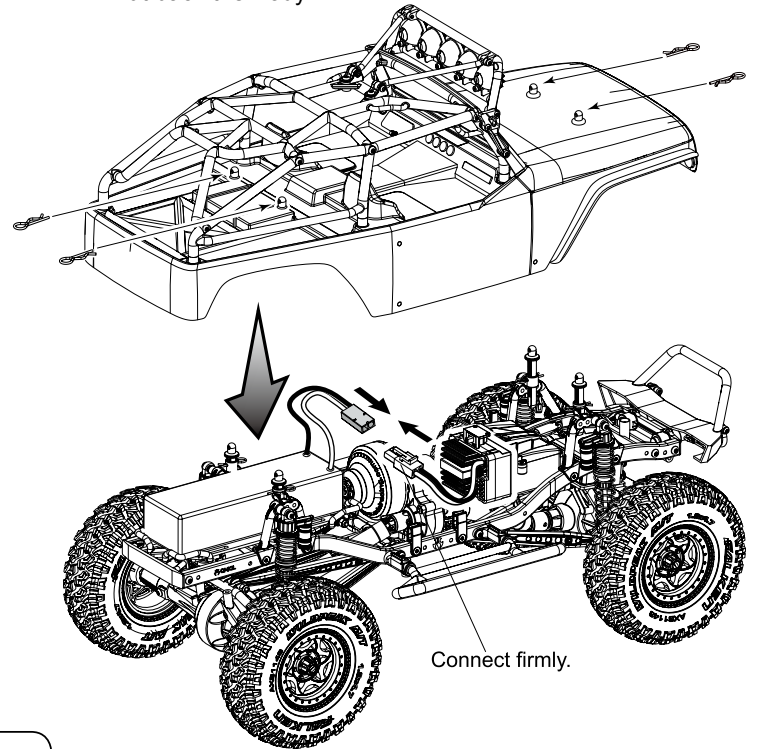


3. Turn on the transmitter.

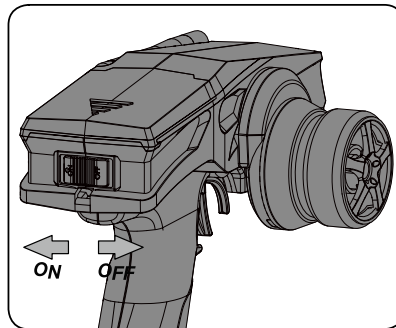

4. Turn on the electronic speed controller.

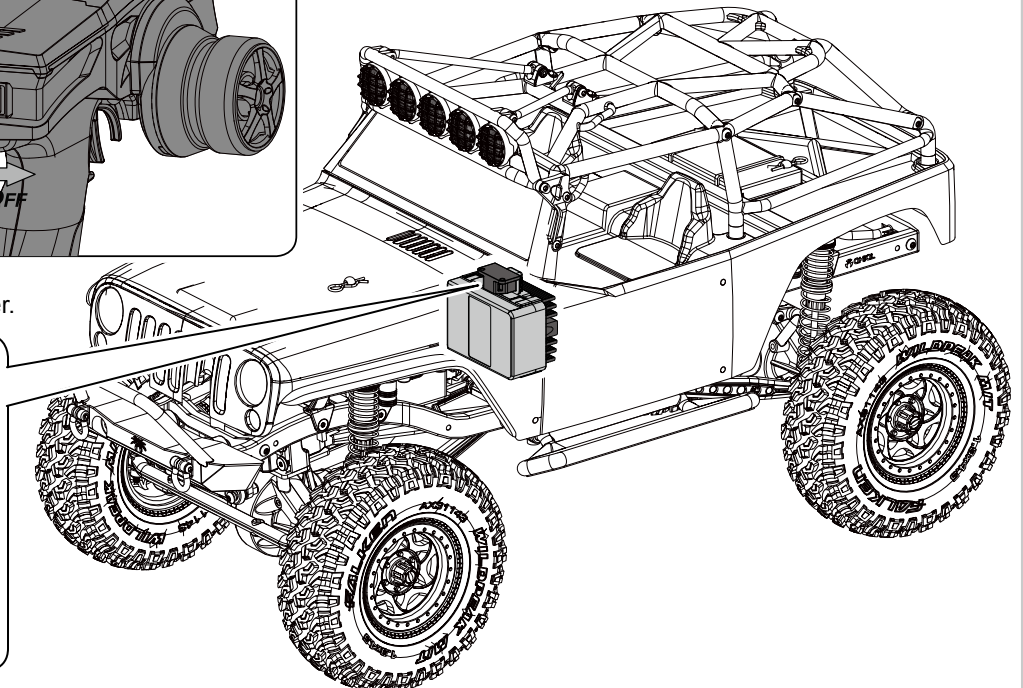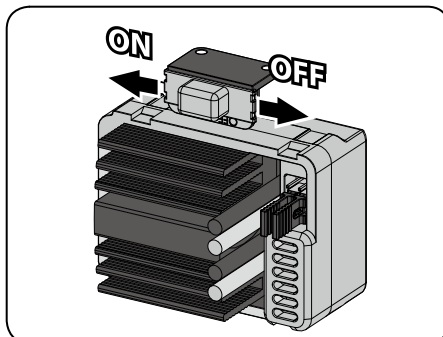


Top View Parts

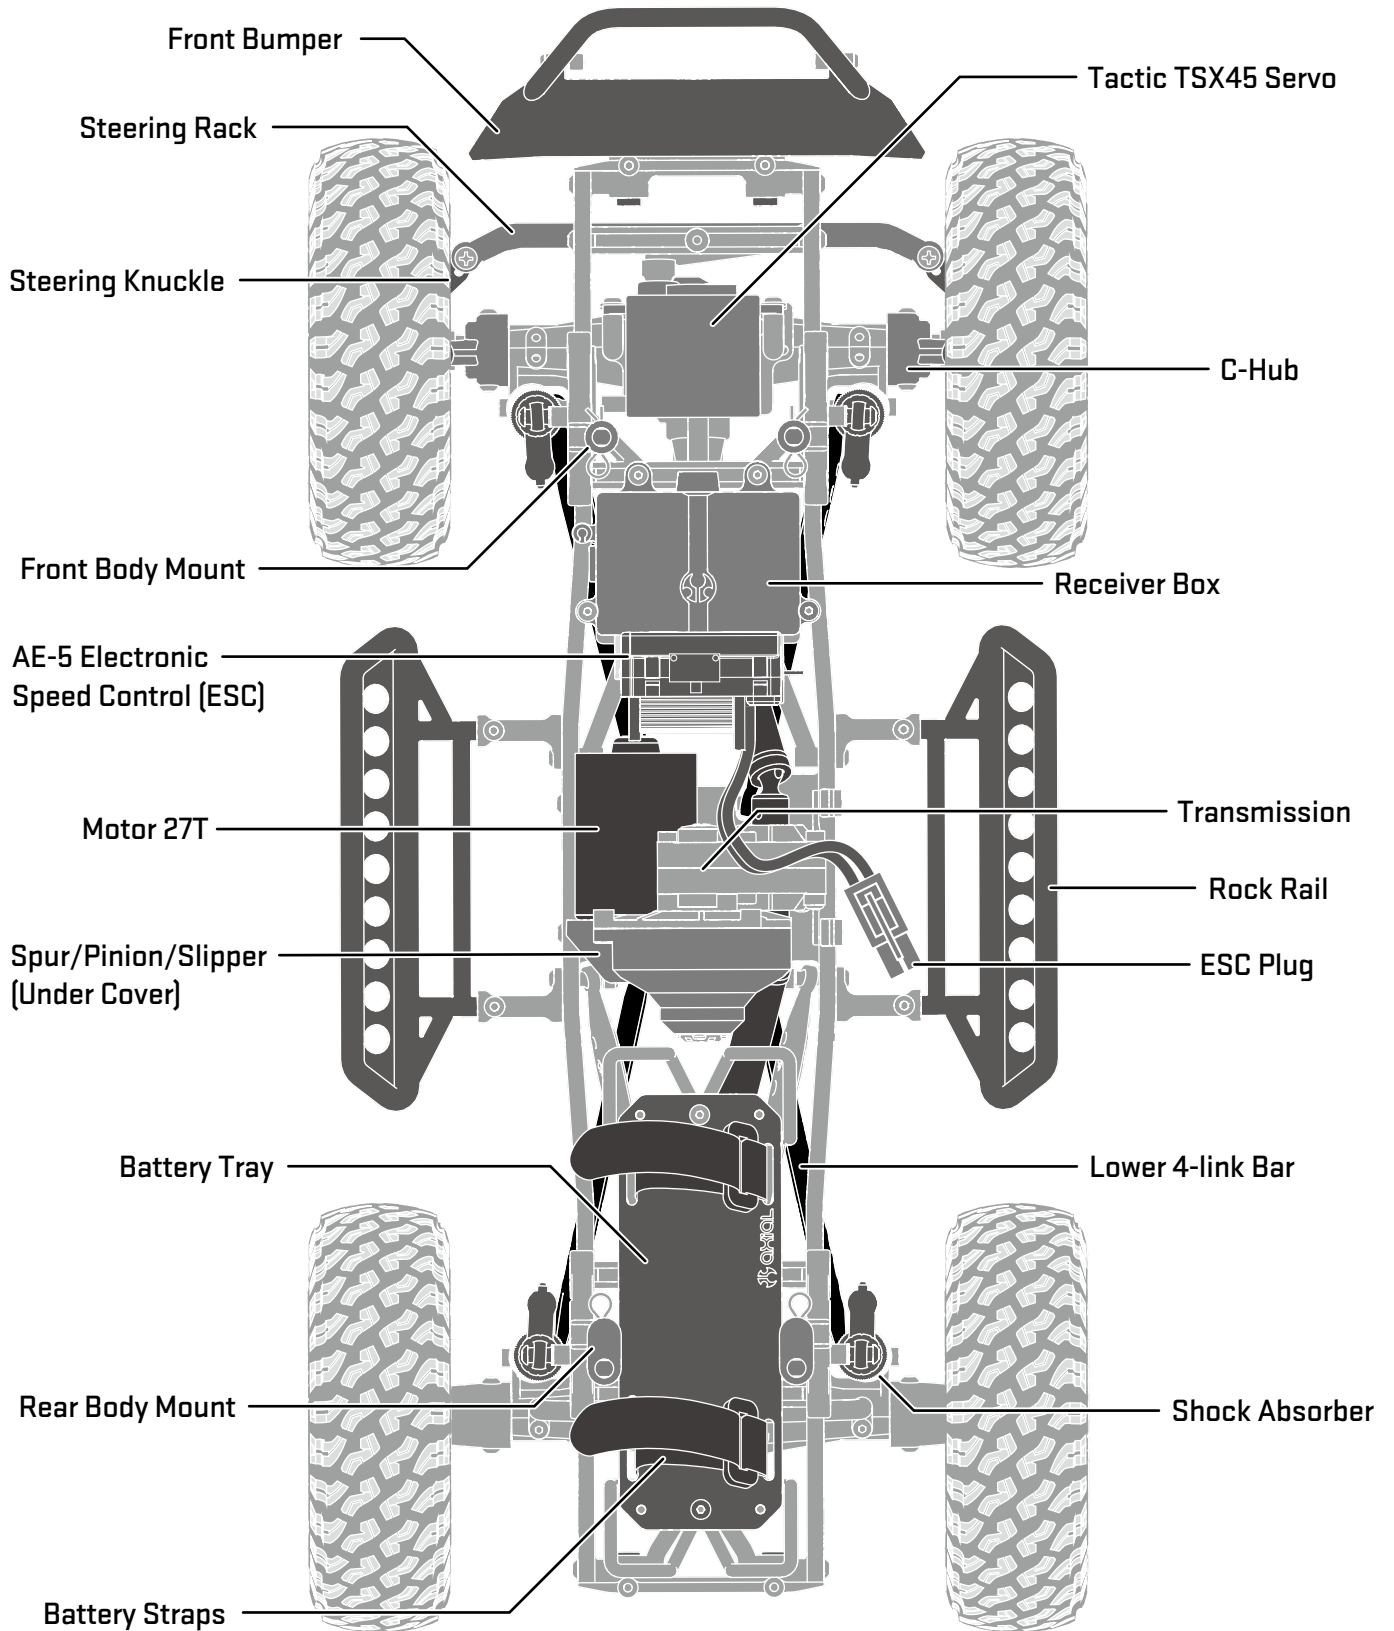


Getting-Started Checklist


The following checklist is a guide for getting you vehicle running for the first time.

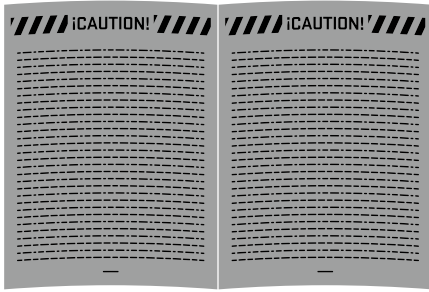


Read 'Cautions' in Manual. (Page 2)

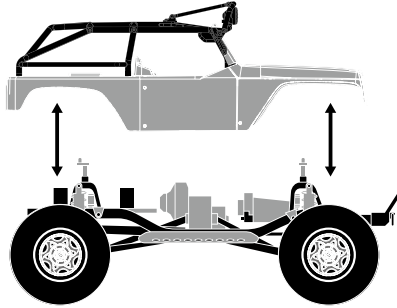


Familiarize yourself with vehicle and its components.

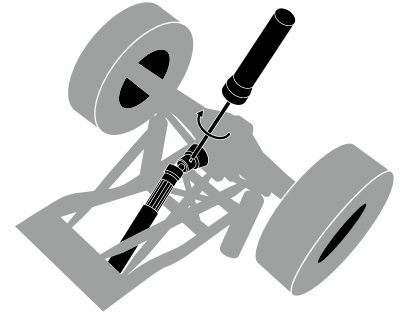


Even though the vehicle is new check driveshaft setscrews and other screws to make sure they are tight from the factory.

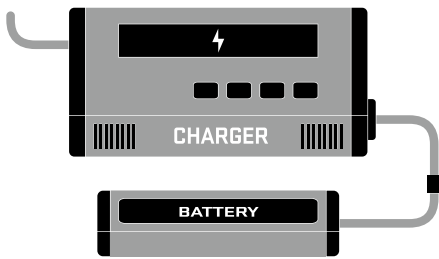


Charge battery pack. (Page 4)




Install 4X AA batteries into Transmitter. (Page 7)

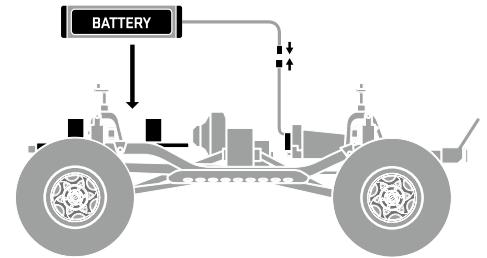

Install battery pack in vehicle. (Page 4)

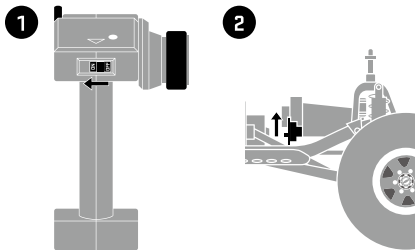


Turn on transmitter FIRST then ESC. (Page 4)

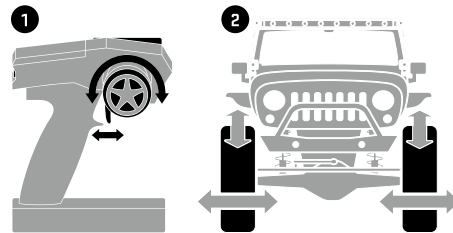


Check to make sure steering and throttle operation work correctly. (Page 7)



Range check radio system. (Next Page)

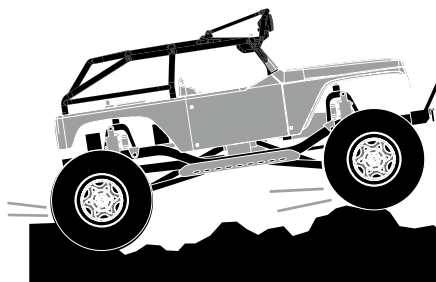

Drive vehicle, challenge yourself and have fun!

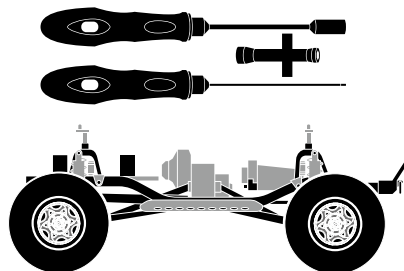

Maintain vehicle. (Next Page)

Range-Checking Your Radio System

The radio system should be checked before operating the vehicle to ensure it's operating properly and has adequate range.

















1. Turn on the transmitter first and then the vehicle.
2. Have a friend hold the vehicle while keeping hands and loose clothing away from moving parts.
3. Walk away until you are at the farthest distance you plan to operate the vehicle.
4. Steer the vehicle back and forth and throttle both forward and reverse making sure there is no erratic behavior.
5. If any erratic behavior is exhibited do not operate the vehicle, call customer service for further assistance.




RANGE-CHECKING FOR DISTANCE

Maintaining Your Vehicle

Just like a full size car or truck your RC vehicle must undergo periodic maintenance in order to ensure peak running performance. Preventative maintenance will also help avoid needless breakages which could result in costly repairs. Below are some suggestions to properly maintain your vehicle.

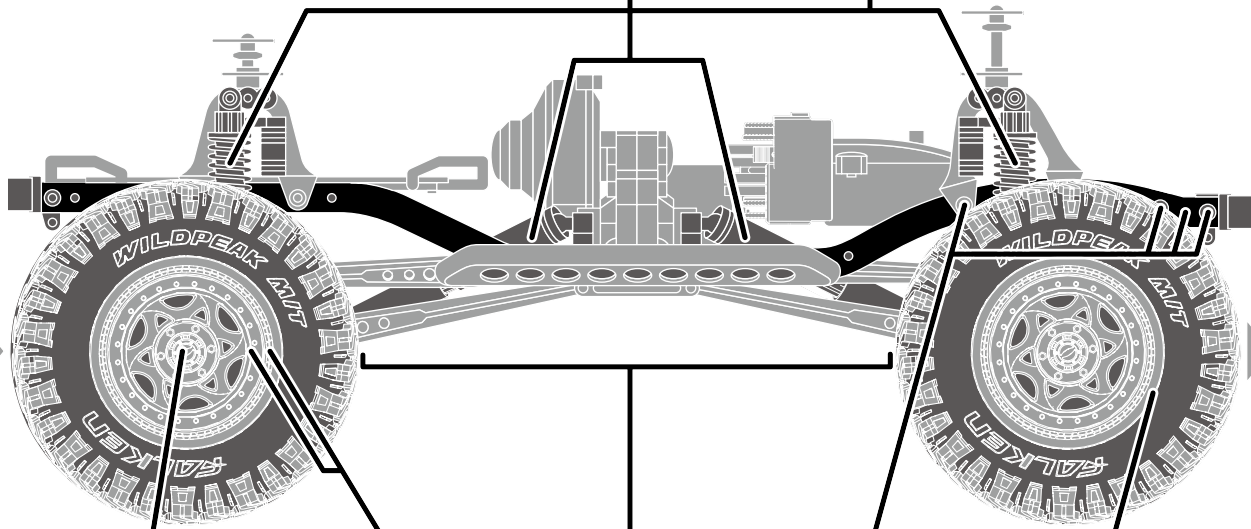

AE-5 Forward/Reverse ESC w/ Drag Brake

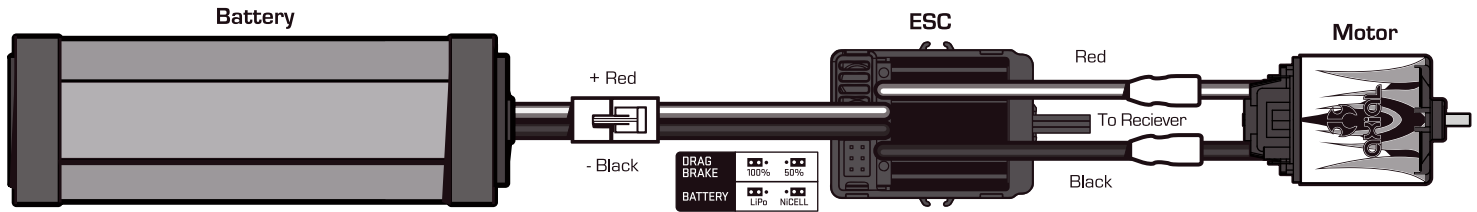

Setup:

Throttle calibration should not be needed out-of-the-box. However in order to make the ESC match the throttle range of different transmitters, the calibration of the ESC is necessary:

- Mount the ESC in an area that is well ventilated and isolated from vibration and shock.
- Connect the ESC wires to the motor red-red & black-black.
- Plug the receiver wire into the throttle channel on the receiver. The black negative wire should be towards the outside of the receiver.
- Before plugging the battery into the ESC, make sure your transmitter is on and the throttle trim is set at zero.
- Plug in the battery to the ESC with the ESC switch in the OFF position.
- To calibrate the ESC, turn on the transmitter keeping throttle stick at its neutral position.
- Wait for 3 seconds to let the ESC execute self-test and automatic throttle calibration.
- When the ESC is ready to run, a long beep sound is emitted from the motor.

Do not reverse the battery wire connections! Reversing the battery polarity will permanently damage the esc.

Notes:

- Drag Brake set to 100% from the factory.
- LiPo Cut-Off is set to "ON" from the factory.

Specifications:

Input Voltage:	2-3S LiPo, 5-9 Cells NiMH/NiCd
Size:	46,5mm x 34mm x 28,5mm
Weight:	70g
Motor Limit:	12T 2S / 18T 3S
On-Resistance FET:	.002
Rated/Peak Current:	180A
Braking Current:	90A
BEC Voltage/A:	5.0V 2/0A Peak
PWM Frequency:	1KHz

Beep Sound and LED Status:

1 Short Beep:	Battery is NiMH/NiCd
2 Short Beeps:	Battery is 2S Lipo
3 Short Beeps:	Battery is 3S Lipo
1 Long Beep:	Self-test and throttle calibration is OK and ESC is ready to run




CONNECT THE BATTERY PACK JUST BEFORE DRIVING AND DISCONNECT IT IMMEDIATELY AFTER.
ALWAYS MAKE SURE YOU ARE CONNECTING THE ESC TO A PROPER POWER SOURCE THAT HAS THE CORRECT VOLTAGE & POLARITY. INCORRECT VOLTAGES OR REVERSED POLARITY WILL DAMAGE THE ESC.
ONCE THE BATTERY PACK IS CONNECTED, HANDLE THE MODEL WITH EXTREME CARE, MAKE SURE YOU ARE CLEAR OF ALL ROTATING PARTS.

NOTES

SETUP BEFORE STARTING - EINSTELLUNG VOR DEM START


Steering and Throttle Reverse Switch Servo Reverse Schalter

Servo Factory Settings
Beachten Sie die Pfeile für die Servo Grundeinstellung



Binding Button Binding Taster

The other side
Rückseite



ST-D/R Steering Dual Rate Maximaler Lenkausschlag



To be used to adjust steering servo rate and range.
Einstellung des maximalen Lenkausschlags.

Battery Level Indicator Batterie Statusanzeige

Good Batteries
Volle Batterien

Low Batteries
Fast leere Batterien

When the batteries are low the green indicator light will flash.

Throttle Trim Gastrimmung

To be used for trimming the throttle operation.
Wird verwendet um den Gasnullpunkt einzustellen.



Steering Trim Lenktrimmung

To be used for trimming the steering operation.
Wird verwendet, um den Geradeauslauf einzustellen.





Charger plug in Ladebuchse



※ Rechargeable AA batteries required.
Charger not included. Nutzen Sie diese Ladebuchse nur mit aufladbaren Batterien.


Power Switch Ein/Aus Schalter

ON AN OFF AUS

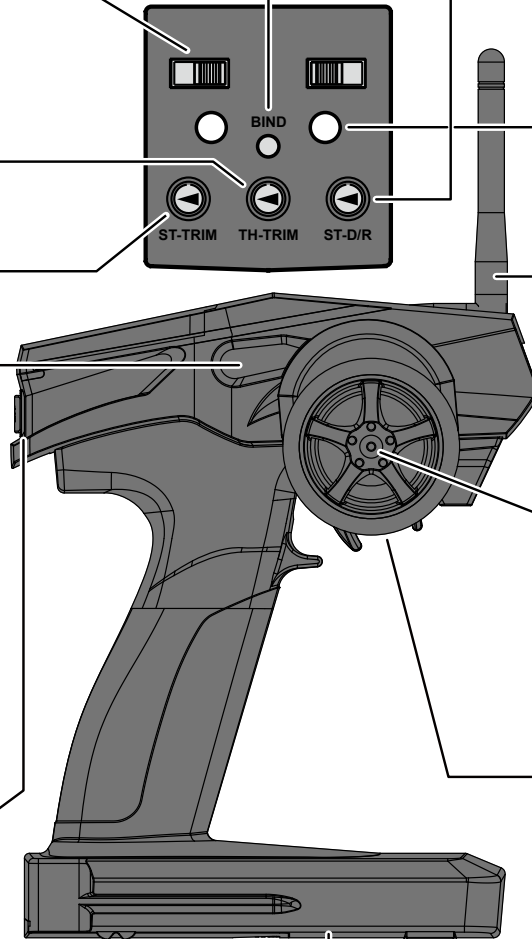


Antenna/Antenne

Flip the antenna up before use




Steering Wheel Lenkrad

To be used for steering operation.
Wird verwendet um das Fahrzeug zu steuern.

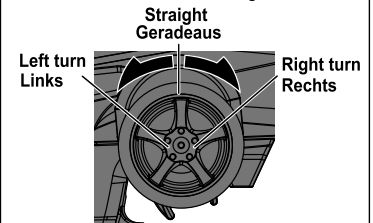

Throttle Trigger Gas/Brems Hebel

To be used for throttle operation.
Um das Fahrzeug zu beschleunigen & abzubremsen.

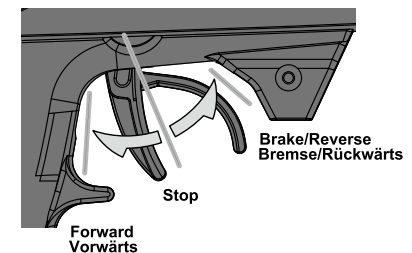

RADIO BINDING INSTRUCTIONS



The radio system is bound from the factory so no binding should be necessary. However, if you are matching a new receiver to the transmitter, please follow these steps:

1. Install AA batteries into the transmitter.
2. Insert the binding plug into CH 3 port on the receiver. (Figure 1)
3. Turn on the receiver. You will notice the two LED's are now flashing meaning the receiver is in 'seek' mode and ready to find the transmitter.
4. Press and hold the binding button on the transmitter while turning on the power switch. (Figure 2)
5. The LED's on the receiver should stop flashing indicating it's now bound to the transmitter.
6. Release the binding button on the transmitter and remove the binding plug from the receiver.
7. Turn off the receiver, then turn off the transmitter. Once powered on again, radio binding has been completed.

If the system did not bind please repeat step's 1-7 again or call Axial Customer Service: (877) 64-AXIAL (877-642-9425). NOTE: the AX-3 transmitter will only bind with the AR-3 receiver


Fail Safe Programming

1. With the radio system bound and powered up, position the throttle trigger to the stop position. For electric applications with drag brake, put the trigger in the stop position. For Nitro applications, position the throttle to apply some amount of brake.
2. With the throttle trigger positioned to desired fail safe position press and hold the button on the receiver until the red LED starts flashing. As soon as it starts flashing release the button; it will then flash for 3 more seconds. Fail safe is now programmed.
3. To test, elevate your vehicle so the tires are off the ground. Apply some throttle and turn the transmitter off. If the throttle returns to neutral within a few seconds, fail safe is programmed correctly. If your vehicle keeps running, fail safe was not programmed correctly; repeat steps 1 and 2.



Battery Cover Batteriefach

4X AA alkaline batteries
4X Piles alcalines AA

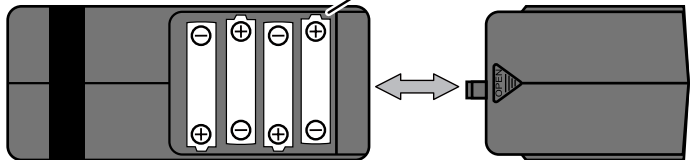

Transmitter Battery Installation/Einglegen der Senderbatterien

Open battery cover at bottom of transmitter. Install batteries. Follow the direction of batteries designated in the inside of battery box.
Öffnen Sie das Batteriefach an der Unterseite des Senders. Legen Sie die Batterien entsprechende der angegebenen Polarität ein.

ATTENTION

Do not mix batteries of different ages or types.
Mischen Sie keine Batterien verschiedenen Typs oder Alters.



- NEVER RUN R/C MODEL IN CROWDED AREA OR NEAR SMALL CHILDREN
- PROTECT YOUR SYSTEM FROM MOISTURE
- REMOVE BATTERY FROM R/C MODEL WHEN STORING




Gear Ratio / Getriebeübersetzung

Use this equation to calculate the final drive ratio.
Final Drive Gear Ratio = 1 / ((pinion/Spur) X .13)

Mit dieser Gleichung können Sie die Gesamtübersetzung berechnen.

Gesamtübersetzung = 1 / ((pinion/Spur) X .13)

Slower - More Torque
Langsamer - Mehr Kraft



Faster - Less Torque
Schneller - Weniger Kraft

		48 Pitch									
		Spur									
		70	72	75	78	81	85	87	90	93	96
Pinion	10								69.23	71.54	73.85
	11								62.94	65.03	67.13
	12							55.77	57.69	59.62	61.54
	13							51.48	53.25	55.03	56.80
	14						46.70	47.80	49.45	51.10	52.75
	15						43.59	44.62	46.15	47.69	49.23
	16						40.87	44.62	43.27	44.71	46.15
	17						36.32	39.37	40.72	42.08	43.44
	18					34.62	34.41	37.18	38.46	39.74	41.03
	19					32.79	34.41	35.22	36.44	37.65	38.87
	20					31.15	32.69	33.46	34.62	35.77	36.92
	21				28.57	29.67	31.14	31.87	32.97	34.07	35.16
	22				27.27	28.32	29.72	30.42	31.47	32.52	33.57
	23				26.09	27.09	28.43	29.10	30.10	31.10	32.11
	24			24.04	25.00	25.96	27.24	27.88	28.85	29.81	30.77
	25			23.08	24.00	24.92	26.15	26.77	27.69	28.62	29.54
	26			22.19	23.08	23.96	25.15	25.74	26.63	27.51	28.40
	27		20.51	21.37	22.22	23.08	24.22	24.79	25.64	26.50	27.35
	28		19.78	20.60	21.43	22.25	23.35	23.90	24.73	25.55	26.37
	29	18.57	19.10	19.89	20.69	21.49	22.55	23.08	23.87	24.67	25.46
	30	17.95	18.46	19.23	20.00	20.77	21.79	22.31	23.08	23.85	24.62
	31	17.37	17.87	18.61	19.35	20.10	21.09	21.59	22.33	23.08	23.82
	32	16.83	17.31	18.03	18.75	19.47	20.43	20.91	21.63	22.36	23.08
	33	16.32	16.78	17.48	18.18	18.88	19.81	20.28	20.98	21.68	22.38
	34	15.84	16.29	16.97	17.65	18.33	19.23	19.68	20.36	21.04	21.72
	35	15.38	15.82	16.48	17.14	17.80	18.68	19.12	19.78	20.44	21.10

Warranty Info

AXIAL LIMITED WARRANTY

Your Axial product is warranted to be free of defects in materials and workmanship when new in the factory sealed box. This warranty does not cover damages due to normal wear and tear, users' failure to perform routine maintenance, error of assembly or installation, modifications or addition of aftermarket parts or option parts. This warranty lasts as long as the original purchaser owns the product and is not transferable (verified by dated itemized sales receipt accompanied with product). In the event of a defect under this warranty, Axial will, at our discretion, repair or replace the product, provided our inspection indicates that an original defect exists. Axial provides a 10-day warranty from the date of purchase on electronics (i.e. servo, esc, radio). Axial reserves the right to replace any product which is no longer available with a product of comparable value and function. If Axial determines the repair is not covered under warranty guidelines, there could be a charge applied for the repair and return shipping charges. Note: Purchasing products from unauthorized distributors may void warranty and prevent support and service.

INTERNATIONAL CUSTOMER WARRANTY

Please return product to the dealer where the purchase was made. If your Axial product purchase was made through an on-line retailer, any warranty issues must be taken care of by that retailer. Axial assumes no responsibility for Axial products sold internationally by on-line retailers.

REPAIR

For warranty repair, please contact Axial Customer Service at (877) 64-AXIAL (877-642-9425).

HOURS AVAILABLE:

8:00 am - 5:00 pm Monday through Friday, Central Time.

Problem
Problem
Problème

Cause
Grund
Cause

Remedy
Lösung
Remède

Does not move
Das Auto fährt nicht
Le véhicule ne bouge pas

Batteries are not installed properly in the transmitter.
Die Batterien sitzen nicht korrekt im Sender.
Les piles ne sont pas placées correctement dans l'émetteur.

Make sure batteries are properly installed.
Legen Sie die Batterien korrekt ein.
Positionnez correctement les piles dans l'émetteur.

Weak or no battery in model.
Leerer oder kein Akku im Auto.
Batterie faible ou non installée

Install charged battery.
Einbauen eines geladenen Akkus.
Mettez en place une batterie chargée

Damaged motor.
Kaputter Motor.
Moteur endommagé

Replace with new motor.
Austausch durch einen neuen Motor.
Remplacez par un nouveau moteur

Frayed or broken wiring.
Beschädigte Verkabelung.
Câble dénudé ou coupe

Splice and insulate wiring completely.
Erneuern und isolieren Sie die kaputte Stelle.
Faites une épissure et isolez complètement le câble.

ESC is shut down by heat protection circuit.
Notabschaltung des Reglers wegen Überhitzung.
Le système ESC est fermé par le circuit de protection thermique.

Stop driving immediately, do not drive the car until the Speed Controller cools down.
Fahren Sie nicht weiter. Warten Sie bis der Fahrten regler abgekühlt ist.
Arrêtez immédiatement de conduire, ne pilotez pas la voiture tant que le contrôleur de vitesse n'a pas refroidi.

No Control.
Keine Kontrolle über das Auto
Pas de contrôle

Improper antenna on transmitter or model.
Zu kurze Antenne am Sender oder Auto.
Antenne inadéquate sur l'émetteur ou le véhicule

Install charged or fresh batteries.
Einbauen voller Batterien.
Mettez des batteries rechargées ou neuves.

Weak or no batteries in transmitter or model.
Leere oder keine Batterien im Sender oder Auto.
Batterie faible ou absente dans l'émetteur ou le véhicule.

Fully extend antenna.
Ziehen Sie die Antenne vollständig aus.
Dépliez complètement l'antenne.

Neutral position or trim is incorrect.
Neutralposition oder Trimmung sind verstellt.
La position neutre est incorrecte ou le trim n'est pas réglé.

Adjust the steering trim.
Stellen Sie die Lenkungstrimmung neu ein.
Réglez le trim de direction.

Are the receiver and battery connections properly connected?
Sind der Empfänger und die Batterieverbindungen ordentlich verbunden?
Son conectadas apropiadamente las conexiones del receptor y la batería?

Check receiver and battery connections.
Prüfen Sie Empfänger und Batterieverbindungen.
Compruebe conexiones de batería y receptor.


Steering and Throttle Function Reversed.
Lenkung und Gas funktionieren genau verkehrt herum.
Direction et accélération inverses.

Servo reverse switch is in wrong position.
Servorichtungs-Schalter ist in der falschen Position.
L'interrupteur de marche arrière du servo est dans la mauvaise position


Set to correct position.
Satz, Position zu korrigieren
Vérifiez la position correcte

Please check that the wires from ESC to motor are connected properly.
Bitte überprüfen Sie, ob die Kabel vom Regler zum Motor richtig sitzen.
Veuillez vérifier que les fils allant de l'ESC au moteur sont correctement raccordés.


Check to make sure motor and ESC are properly connected.
Kontrolle sich zu vergewissern, dass Motor und ESC ordentlich verbunden sind.
Le contrôle pour assurer que le moteur et ESC est convenablement connecté.

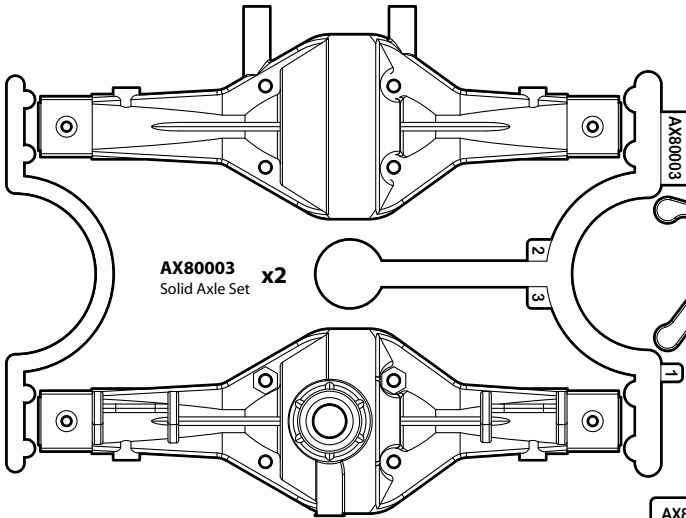


AX80003
Solid Axle Set **x2**




AX80012
C Hub Carrier **x1**

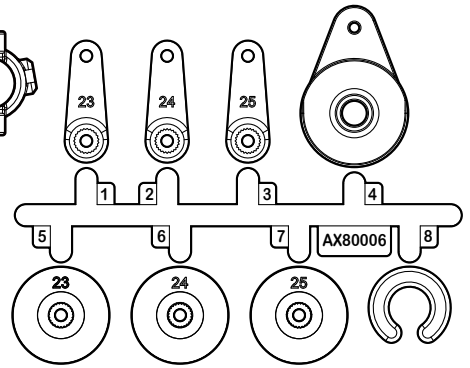


AX80006
Servo Set **x1**




AX80020
Straight Axle Adapter Parts Tree **x1**

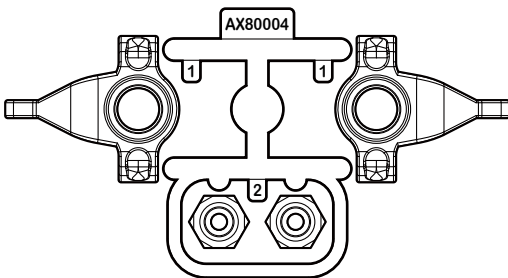


AX80004
Hub Set **x1**

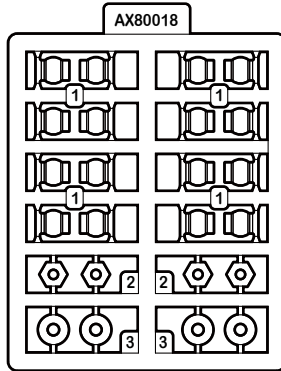


AX80018
Hardware Parts Tree **x2**

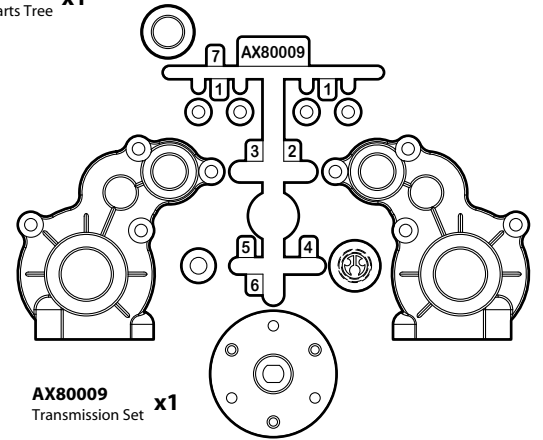


AX80009
Transmission Set **x1**

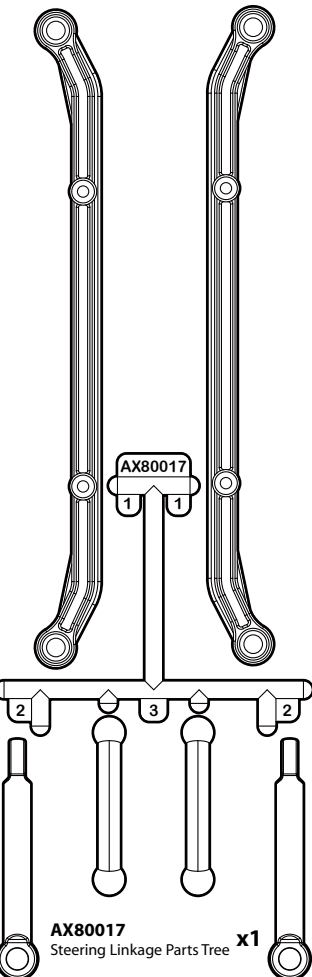


AX80017
Steering Linkage Parts Tree **x1**

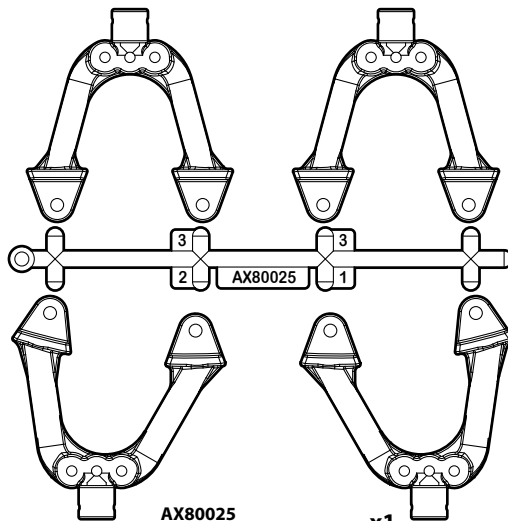


AX80025
SCX10 Shock Hoops Parts Tree **x1**

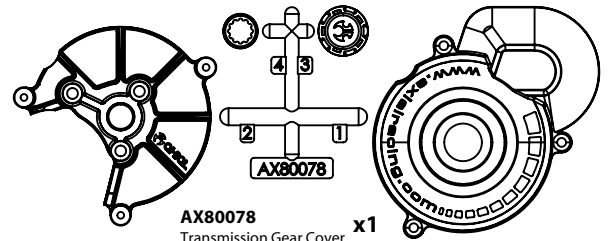


AX80078
Transmission Gear Cover **x1**




AX80002
Diff Case **x2**

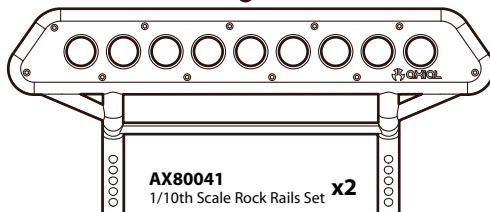


AX80041
1/10th Scale Rock Rails Set **x2**

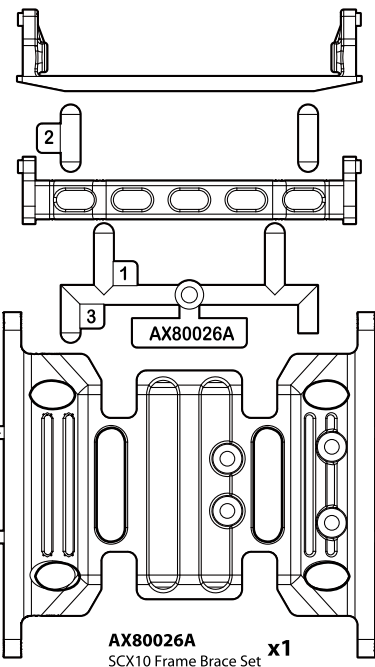


AX80026A
SCX10 Frame Brace Set **x1**

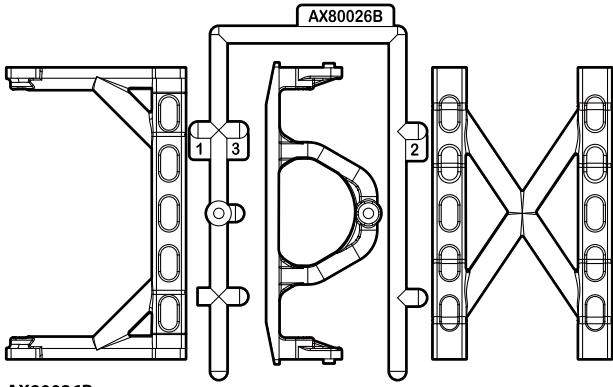



AX80026B
SCX10 Frame Brace Set **x1**

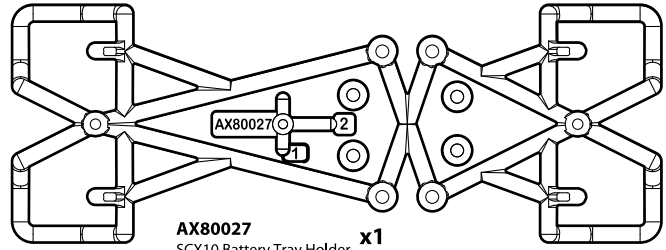


AX80027
SCX10 Battery Tray Holder **x1**

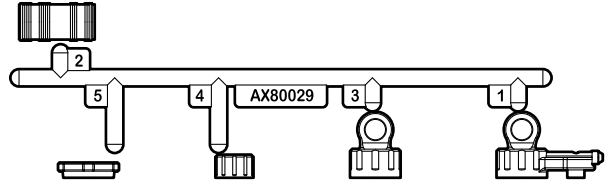


AX80029
Shock Cap Parts Tree **x4**

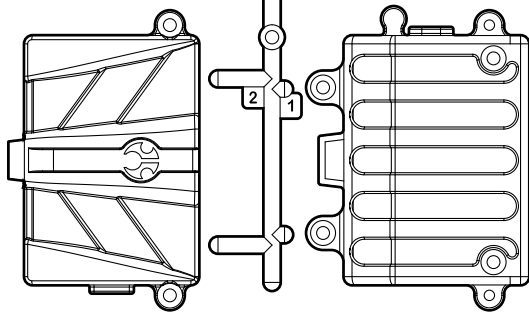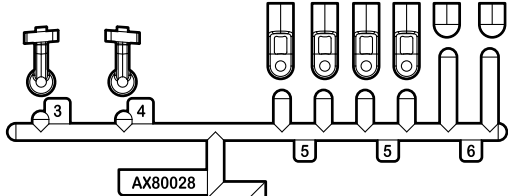


AX80028
SCX10 Radio Box Parts Tree **x1**

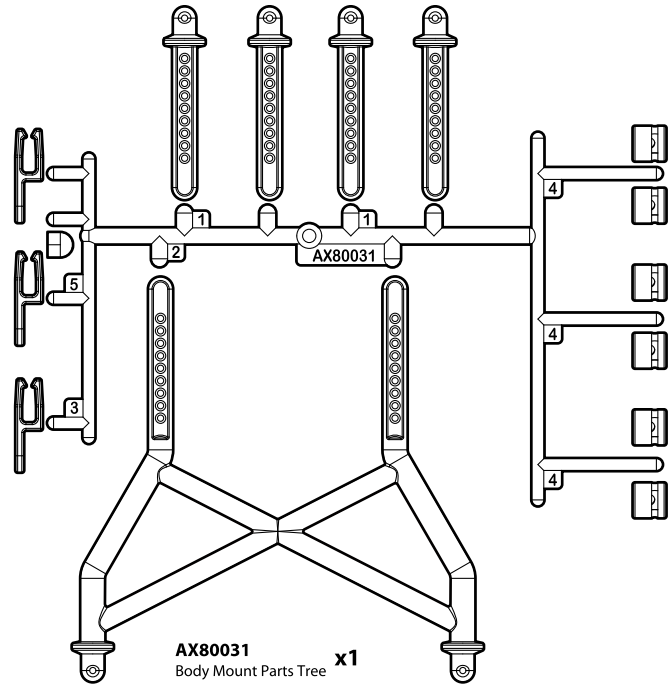


AX80031
Body Mount Parts Tree **x1**




AX80030
61-90 Shock Body Set **x2**

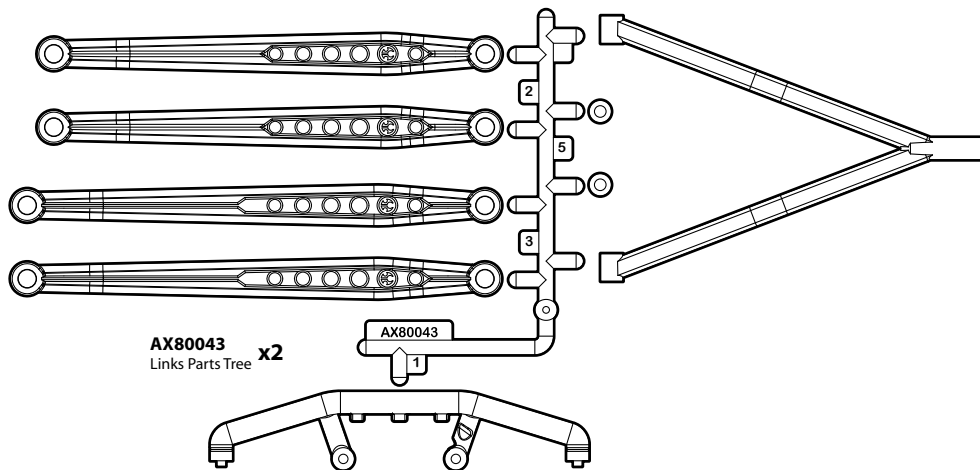



AX80043
Links Parts Tree **x2**

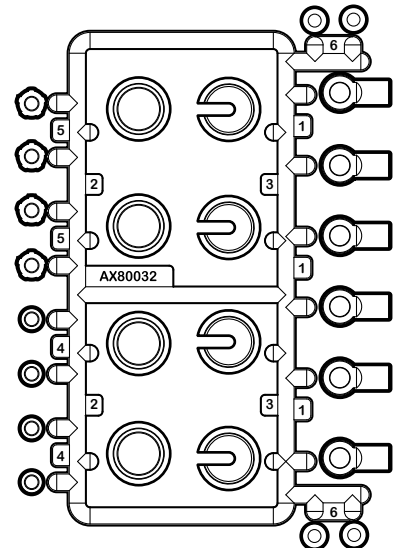


AX80032
Shock Parts **x1**

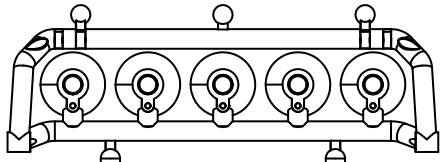


AX80085
Light Bar 1 **x1**

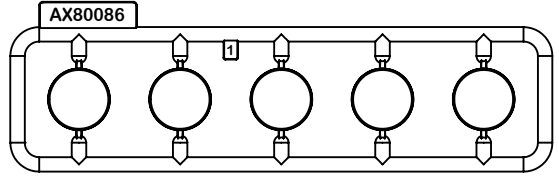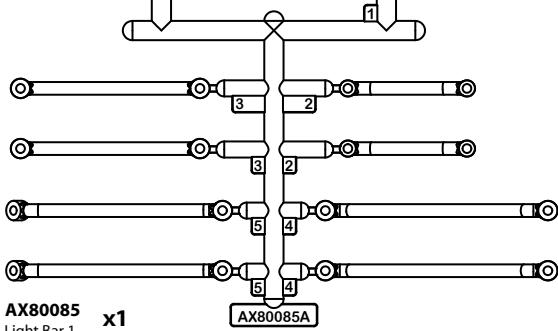


AX80086
Light Bar Lenses **x1**

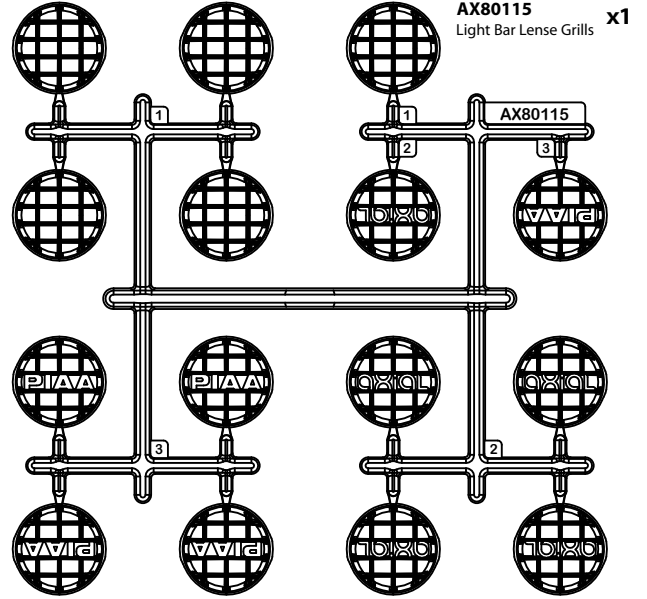


AX80115
Light Bar Lens Grills **x1**

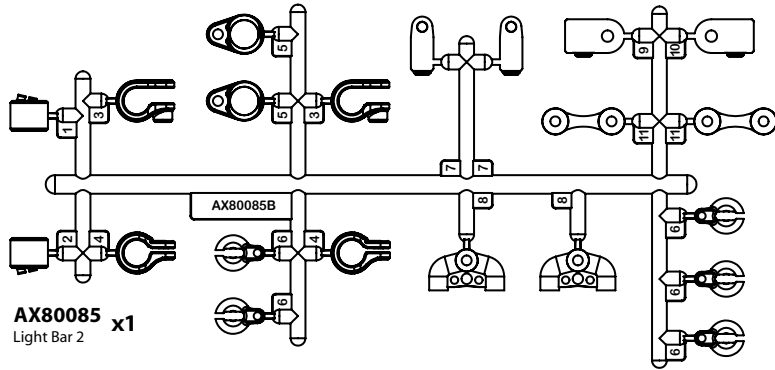


AX80085
Light Bar 2 **x1**

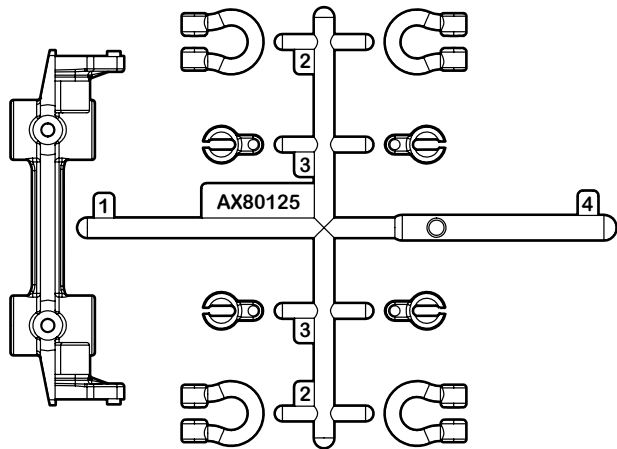


AX80125
Poison Spyder Front Bumper **x1**

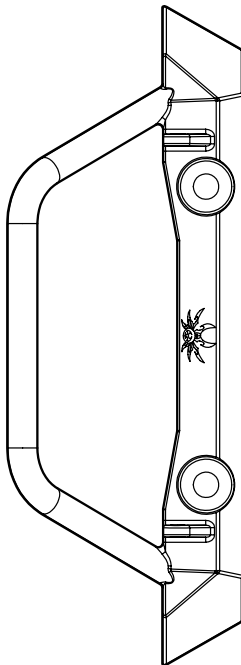


AX31114
WB8-HD Driveshaft **x1**

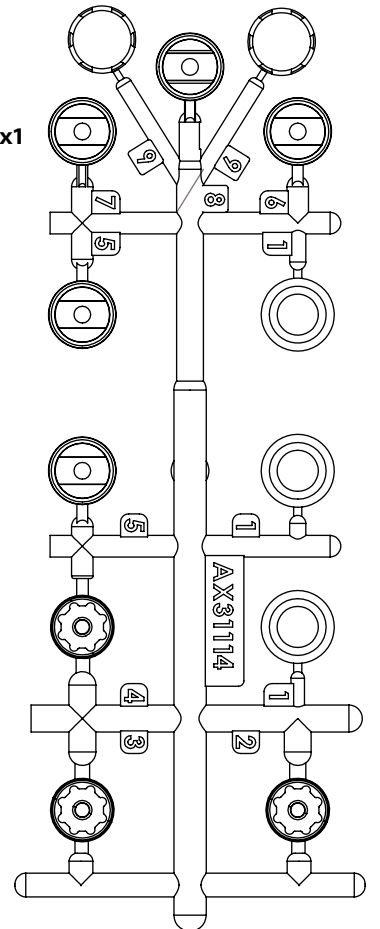


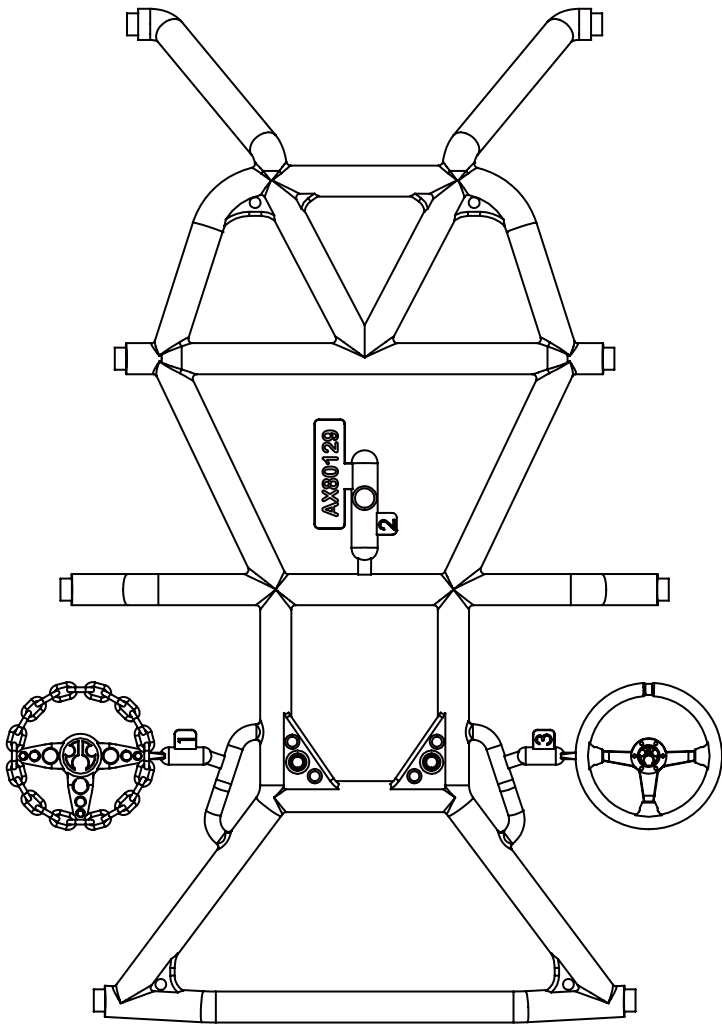


AX80129 x1
Roll Cage Top

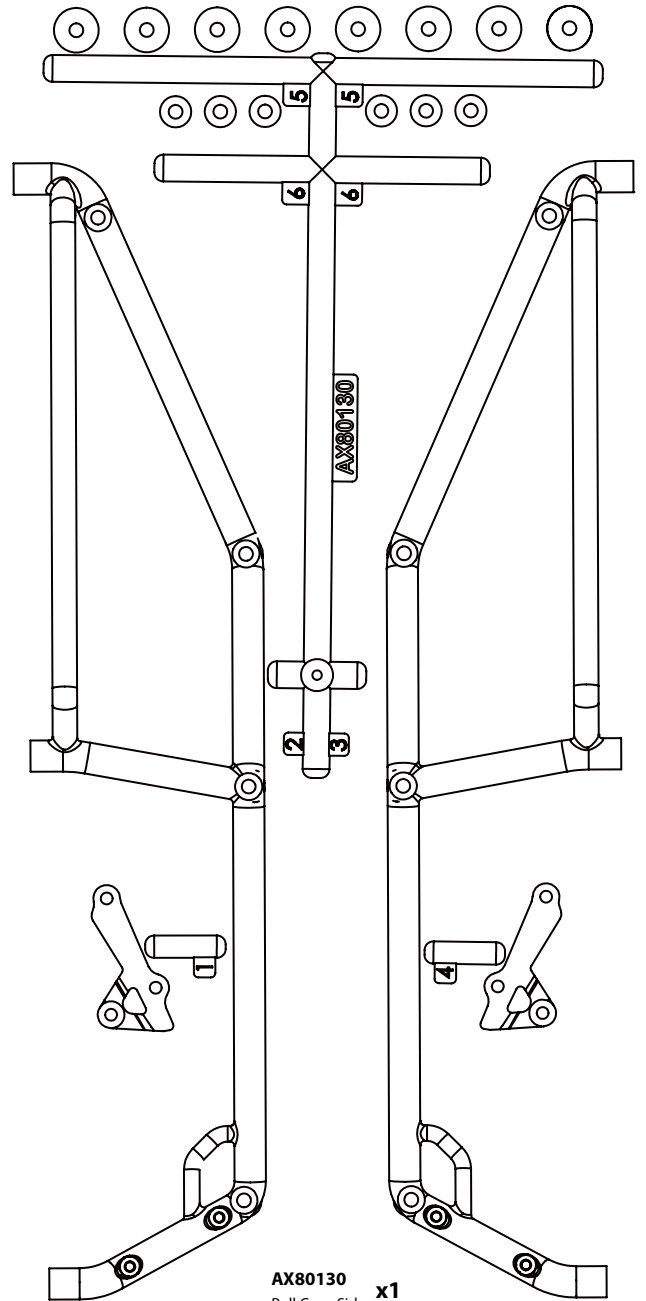


AX80130 x1
Roll Cage Sides

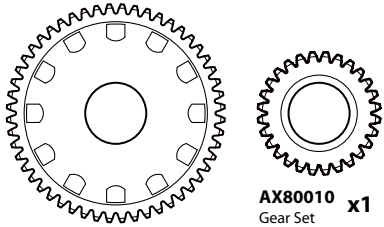


AX80010 x1
Gear Set




AX31027 x1
4x11mm bushing




AX08138 x4
1.9 Walker Evans Wheels - Black

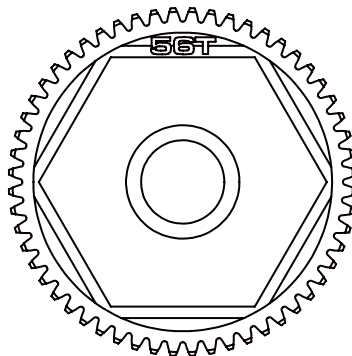

AX31027 x1
56T 32P Spur gear



AX8087 x1
Wheel Cap



AX30146
Shock Shaft 3x50mm **x4**



AX30166
Pin 1.5x11mm **x4**



AX30162
Pin 1.5x8mm **x2**




AX30163
Pin 2x10mm **x6**




AX31028
Pin 2x11mm **x4**





AX30190
Shaft 5x18 **x1**




AX30366
Axle 5x35mm **x2**



AX31148
WB8-HD Coupler Set **x4**



AX31148
WB8-HD Coupler Set **x4**



AX31149
Drive gear Shaft 5x54.5mm **x4**




AX30408
Input Shaft 5x29mm **x2**




AX31148
Universal joint Axle Pin holder **x4**


AX30435
Outdrive Shaft **x1**



AX30435
Outdrive Shaft **x1**

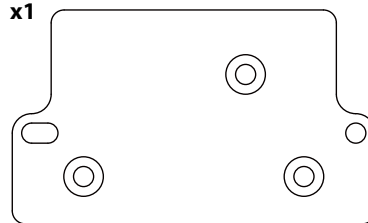


AX30485
AX10 Scorpion Servo Plate **x1**




AX30200
Spring 12.5x20mm **x4**



AX30207
Spring 12.5x40mm **x4**

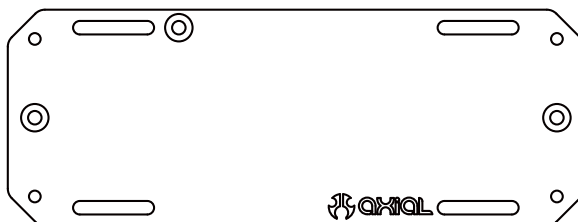

AX30483
AX10 Scorpion Battery Tray **x1**




AX31026
Slipper Plate **x2**




AX30413
Spring 8.5x12 **x1**




AX30427
12mm Aluminum Hub **x4**




AX30420
Solid Axle Dogbone 6x74mm **x2**




AX30421
Solid Axle Dogbone 6x104.5mm **x2**



AX31068
Slipper Pad **x2**



AX30385
Diff Gasket 16x25x0.5mm **x2**



AX30392
38T Bevel Gear **x2**

AX30450
Flange Pipe 3x4.5x5.5 **x4**





AX30499
Transmission Spacer
5x6.9x4.8mm - Grey **x1**



AX30393
13T Bevel Gear **x2**


AX30491
AX10 Scorpion Motor Plate **x1**



AX30500
Heavy Duty Locker **x2**




AX30394
20T Drive Gear **x1**



AX30724
Pinion Gear
32P 13T - Steel **x1**


AX30502
SCX10 Chassis Rail **x2**

 **AXA013**
M2x6mm **x14**

 **AXA015**
M2x10mm **x8**

 **AXA083**
M3x6mm **x2**


 **AXA086**
M3x12mm **x4**

 **AXA087**
M3x16mm **x8**


 **AXA088**
M3x20mm **x1**


 **AXA089**
M3x25mm **x7**


 **AXA1045**
M4 Nylon Lock Nut **x5**


 **AXA1053**
M3 Nylon Locking Hex Nut **x15**


 **AXA1059**
6mm Body Clip **x8**


 **AXA1179**
O-Ring 2.5x1.5mm **x8**

 **AXA1070**
Washer 3x6x0.5mm **x3**


 **AXA1163**
O-Ring 7x1mm **x4**


 **AXA1218**
Bearing 5x10x4mm **x4**


 **AXA1221**
Bearing 5x11x4mm **x10**


 **AXA1225**
Bearing 8x16x5mm **x2**

 **AXA1230**
Bearing 10x15x4mm **x6**

 **AXA0109**
M3x10mm **x4**


 **AXA31073**
M3x4x1.5mm Step Screw **x2**

 **AXA1358**
Shock Damper 3x7x8 **x4**

 **AXA1417**
5x6mm Spacer - Grey **x4**

 **AXA1392**
E2 e-clip **x8**

 **AXA1393**
E2.5 e-clip **x2**

 **AXA176**
M3x2.5x13mm Screw Shaft **x6**

 **AXA0286**
M4x12mm Screw Shaft **x4**

 **AXA291**
M4x4mm Set Screw (Black) **x1**

 **AXA0113**
M3x6mm Hex Socket Button Head **x5**


 **AXA0114**
M3x8mm Hex Socket Button Head **x2**


 **AXA117**
M3x15mm Hex Socket Button Head **x1**


 **AXA119**
M3x20mm Hex Socket Button Head **x4**

 **AXA121**
M3x30mm Hex Socket Button Head **x1**


 **AXA144**
M3x8mm Hex Socket Flat Head **x4**

 **AXA0424**
M2.6x10mm Hex Socket Tapping Button Head **x10**

 **AXA0425**
M2.6x12mm Hex Socket Tapping Button Head **x2**


 **AXA433**
M3x6mm Hex Socket Tapping Button Head **x8**


 **AXA434**
M3x8mm Hex Socket Tapping Button Head **x11**

 **AXA435**
M3x10mm Hex Socket Tapping Button Head **x4**

 **AXA436**
M3x12mm Hex Socket Tapping Button Head **x8**

 **AXA438**
M3x18mm Hex Socket Tapping Button Head **x10**

 **AXA440**
M3x25mm Hex Socket Tapping Button Head **x1**

 **AXA0443**
M3x40mm Hex Socket Tapping Button Head **x1**


 **AXA0414**
M2.6x10mm Hex Socket Tapping Flat Head **x3**

 **AXA463**
M3x6mm Hex Socket Tapping Flat Head **x3**


 **AXA465**
M3x10mm Hex Socket Tapping Flat Head **x4**


 **AXA464**
M3x8mm Hex Socket Tapping Flat Head **x14**

Body Assembly

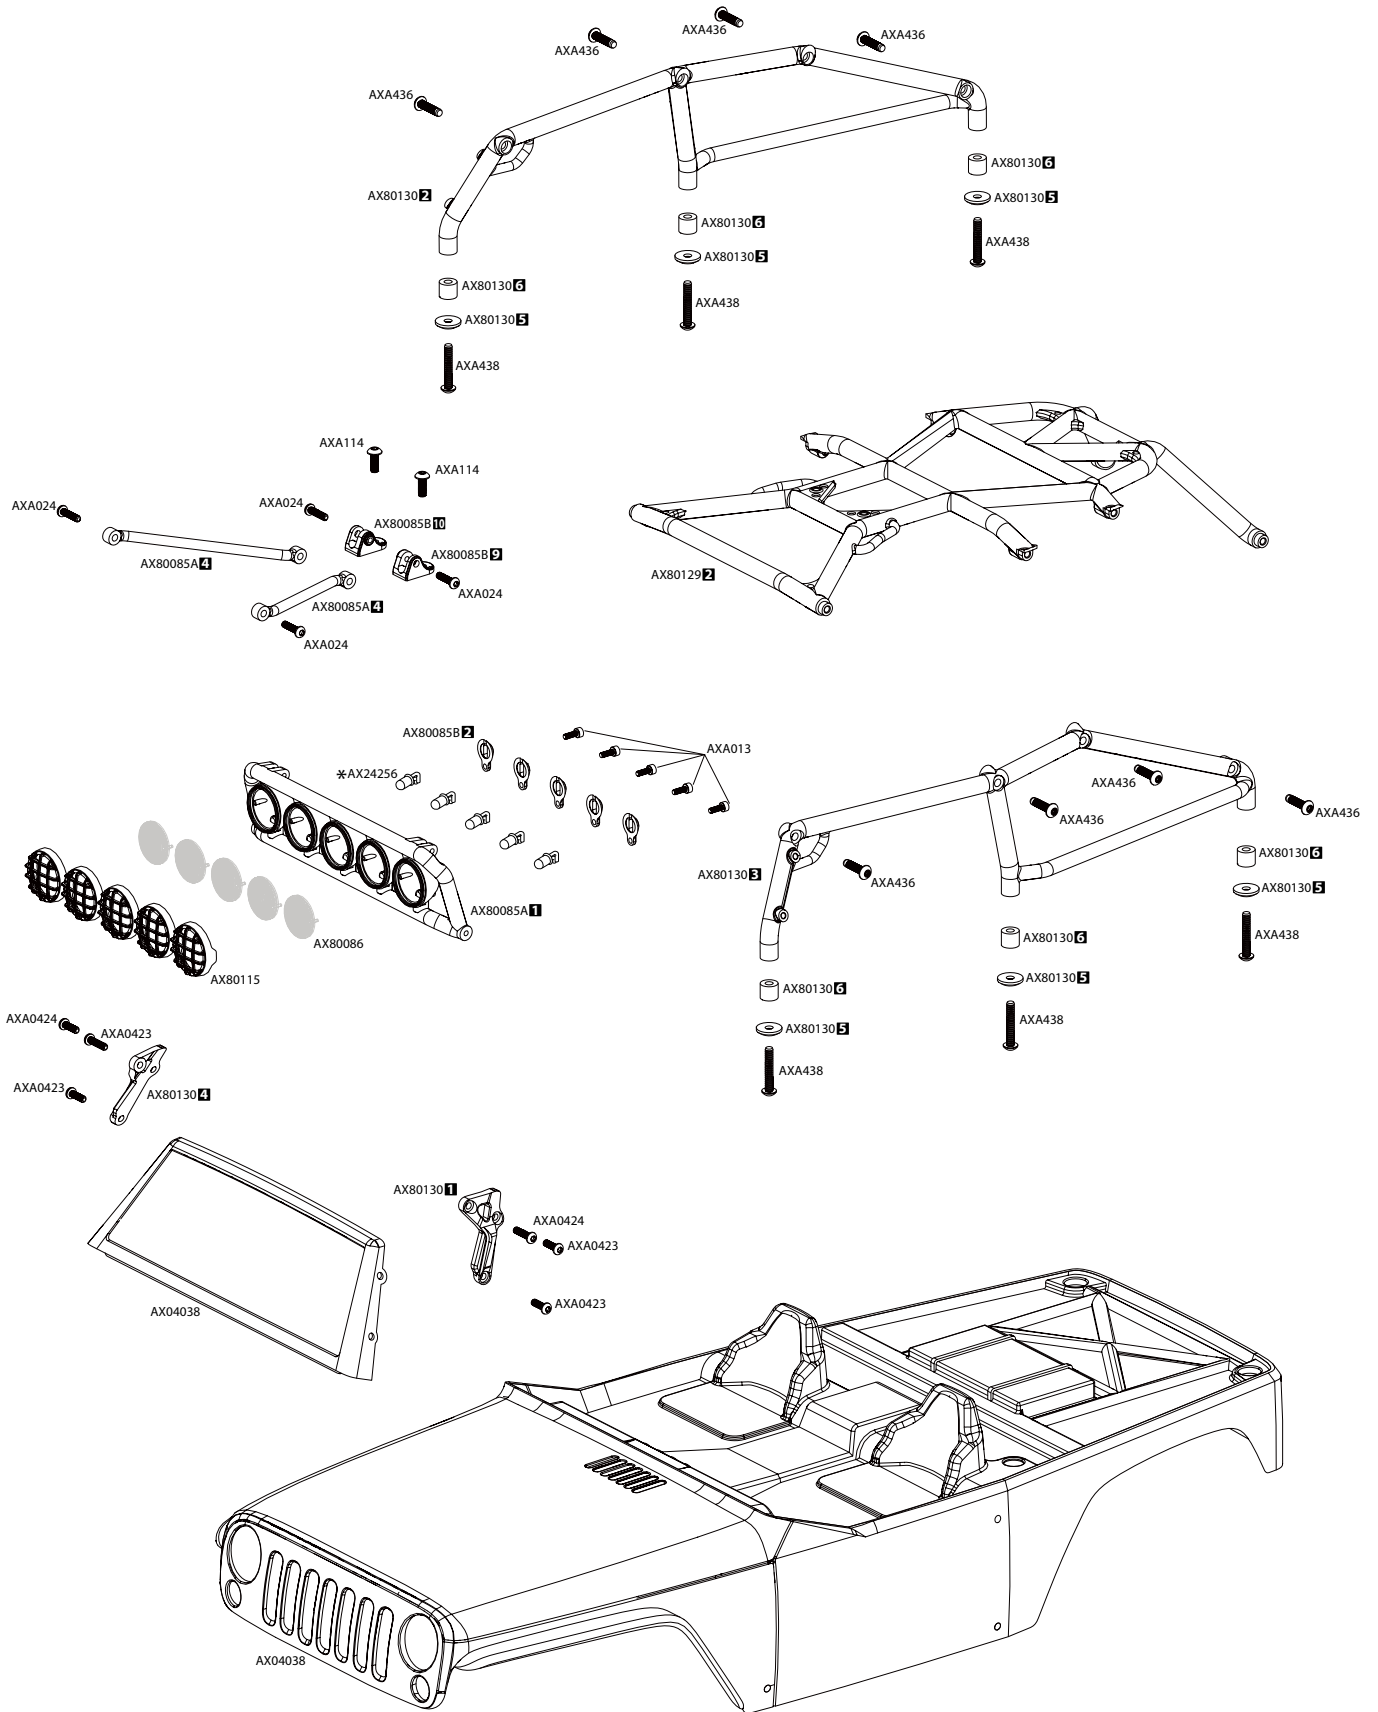





*Sold Separately

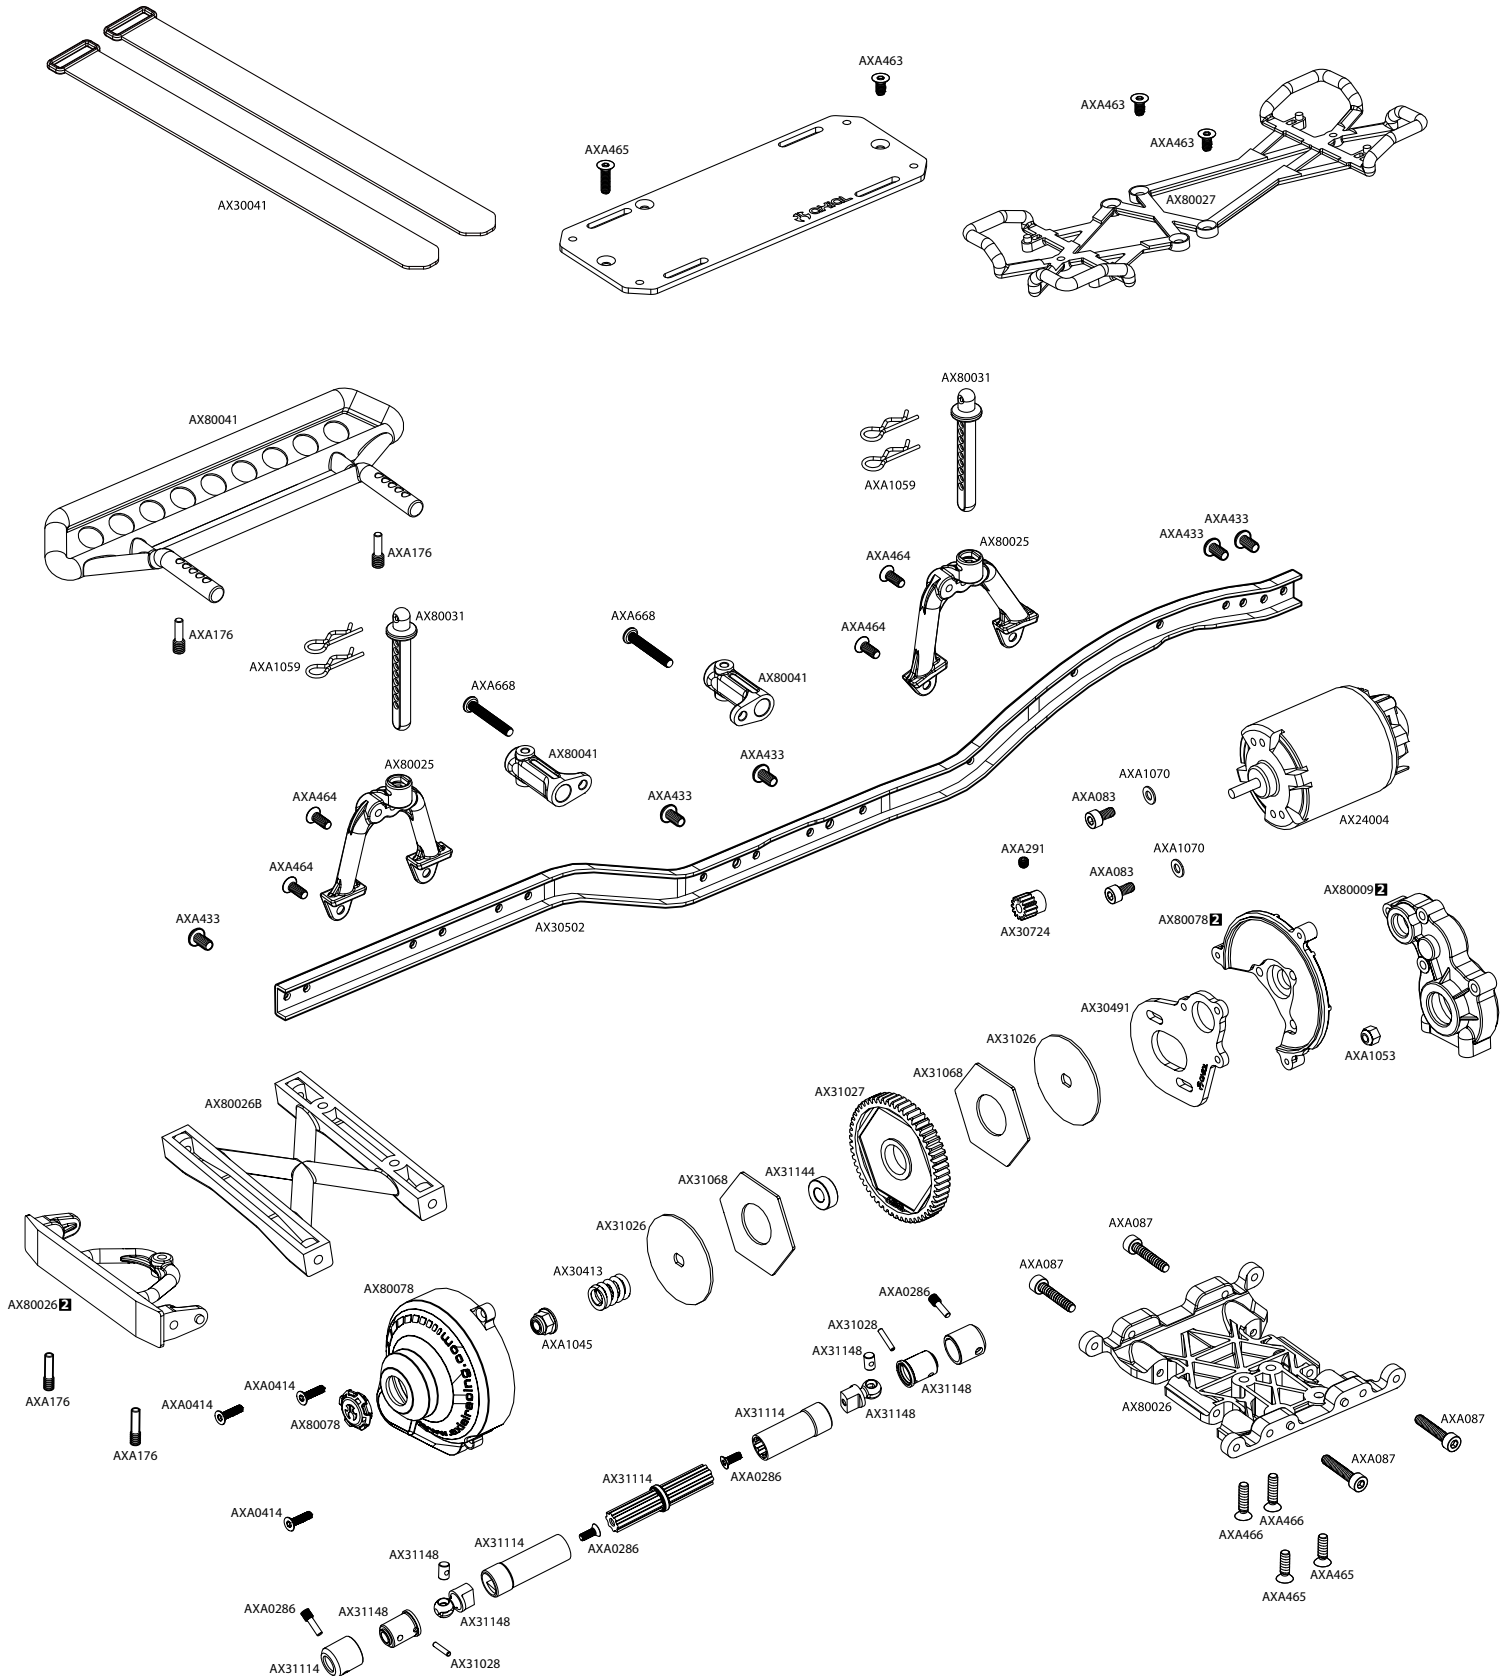

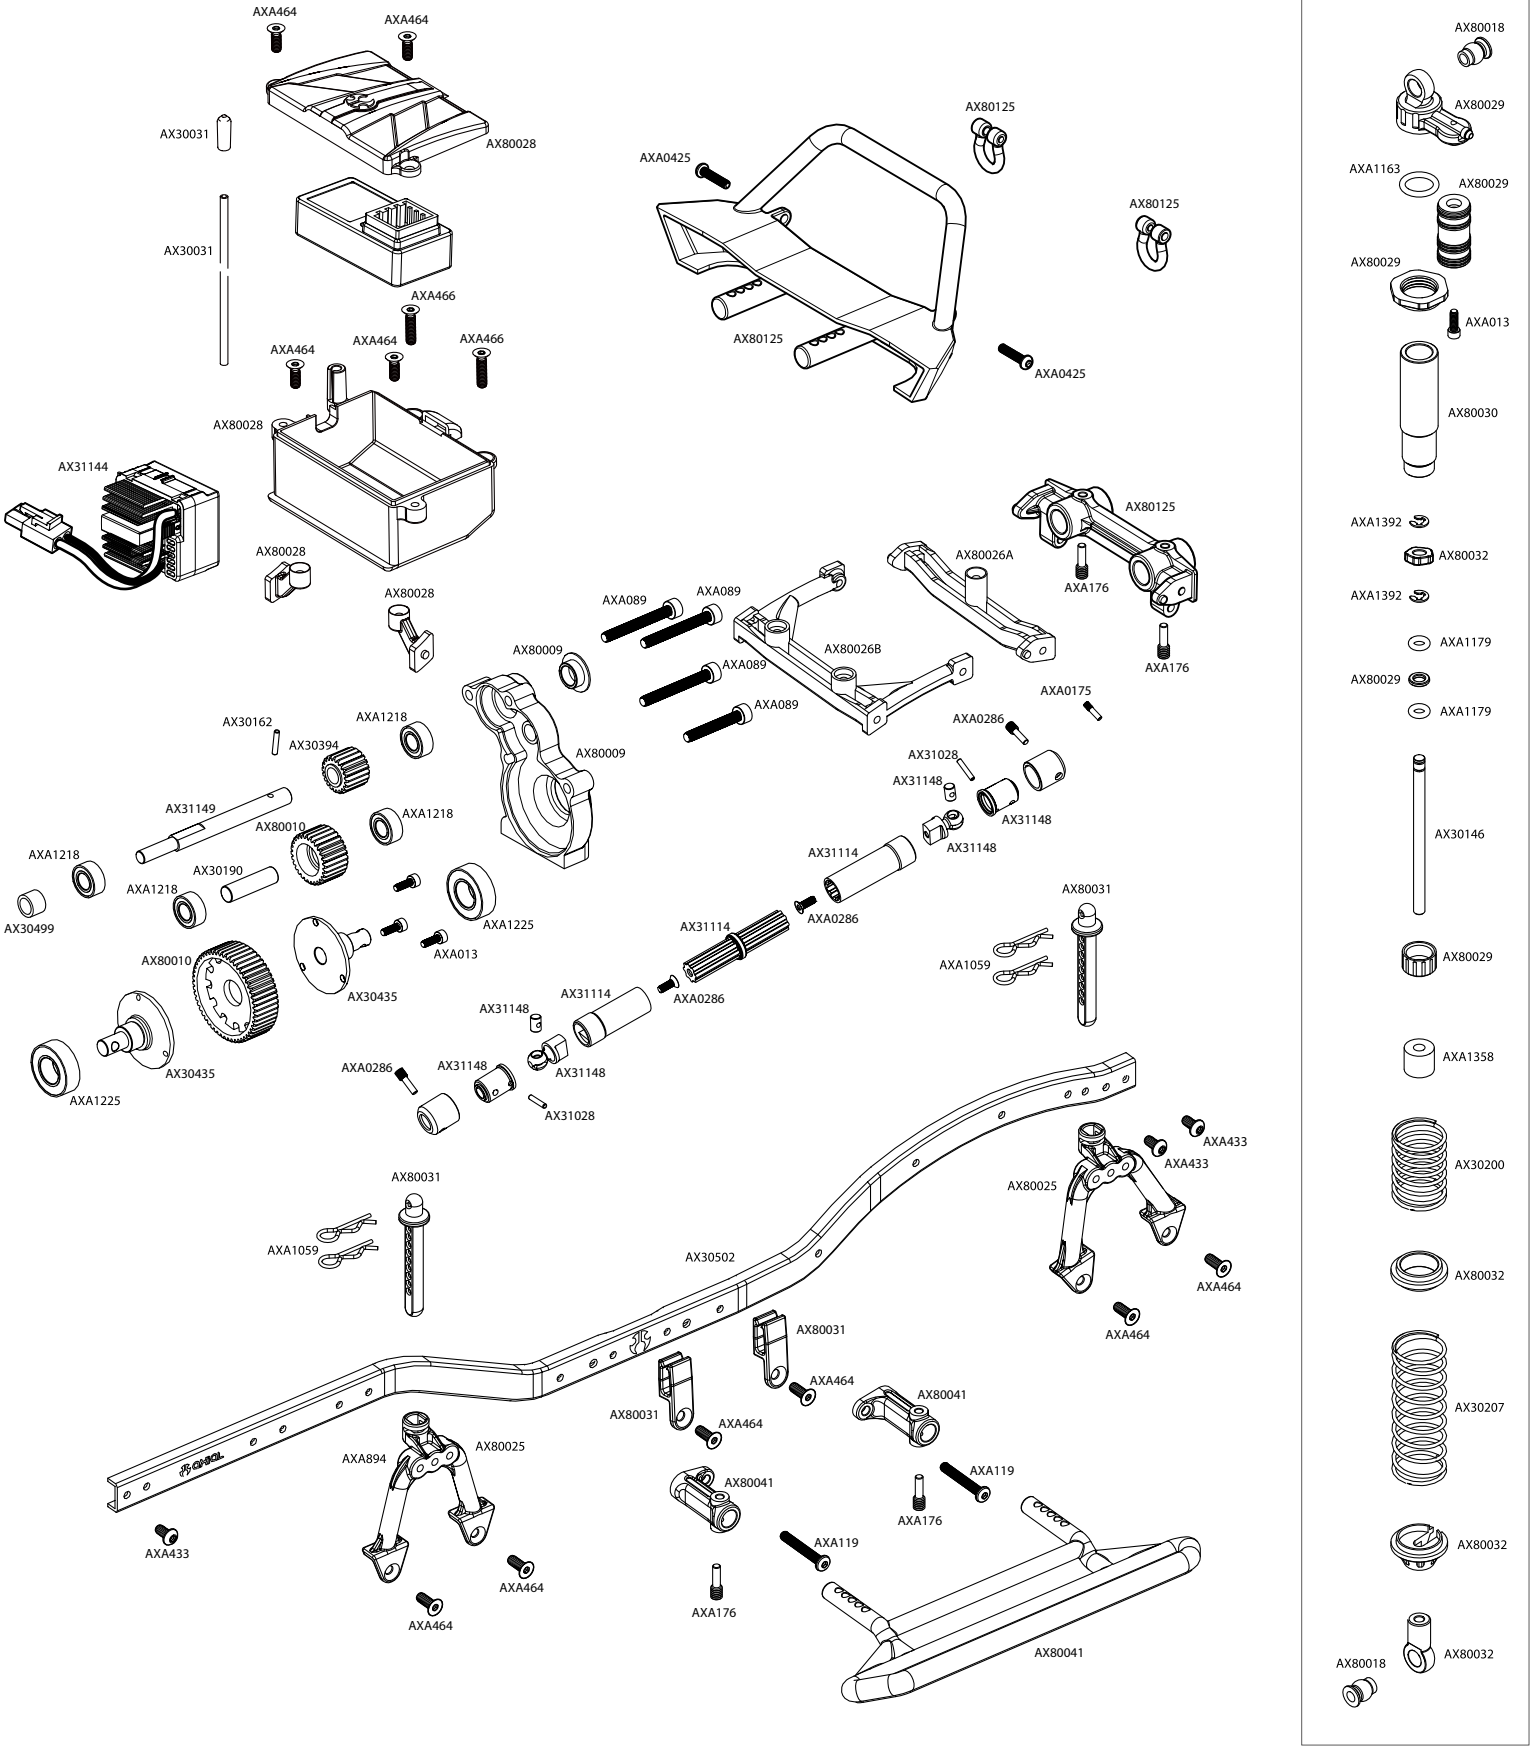

- AX80018
- AX80029
- AXA1163
- AX80029
- AX80029
- AXA013
- AX80030
- AXA1392
- AX80032
- AXA1392
- AXA1179
- AX80029
- AXA1179
- AX30146
- AX80029
- AXA1358
- AX30200
- AX80032
- AX30207
- AX80032
- AX80018
- AX80032

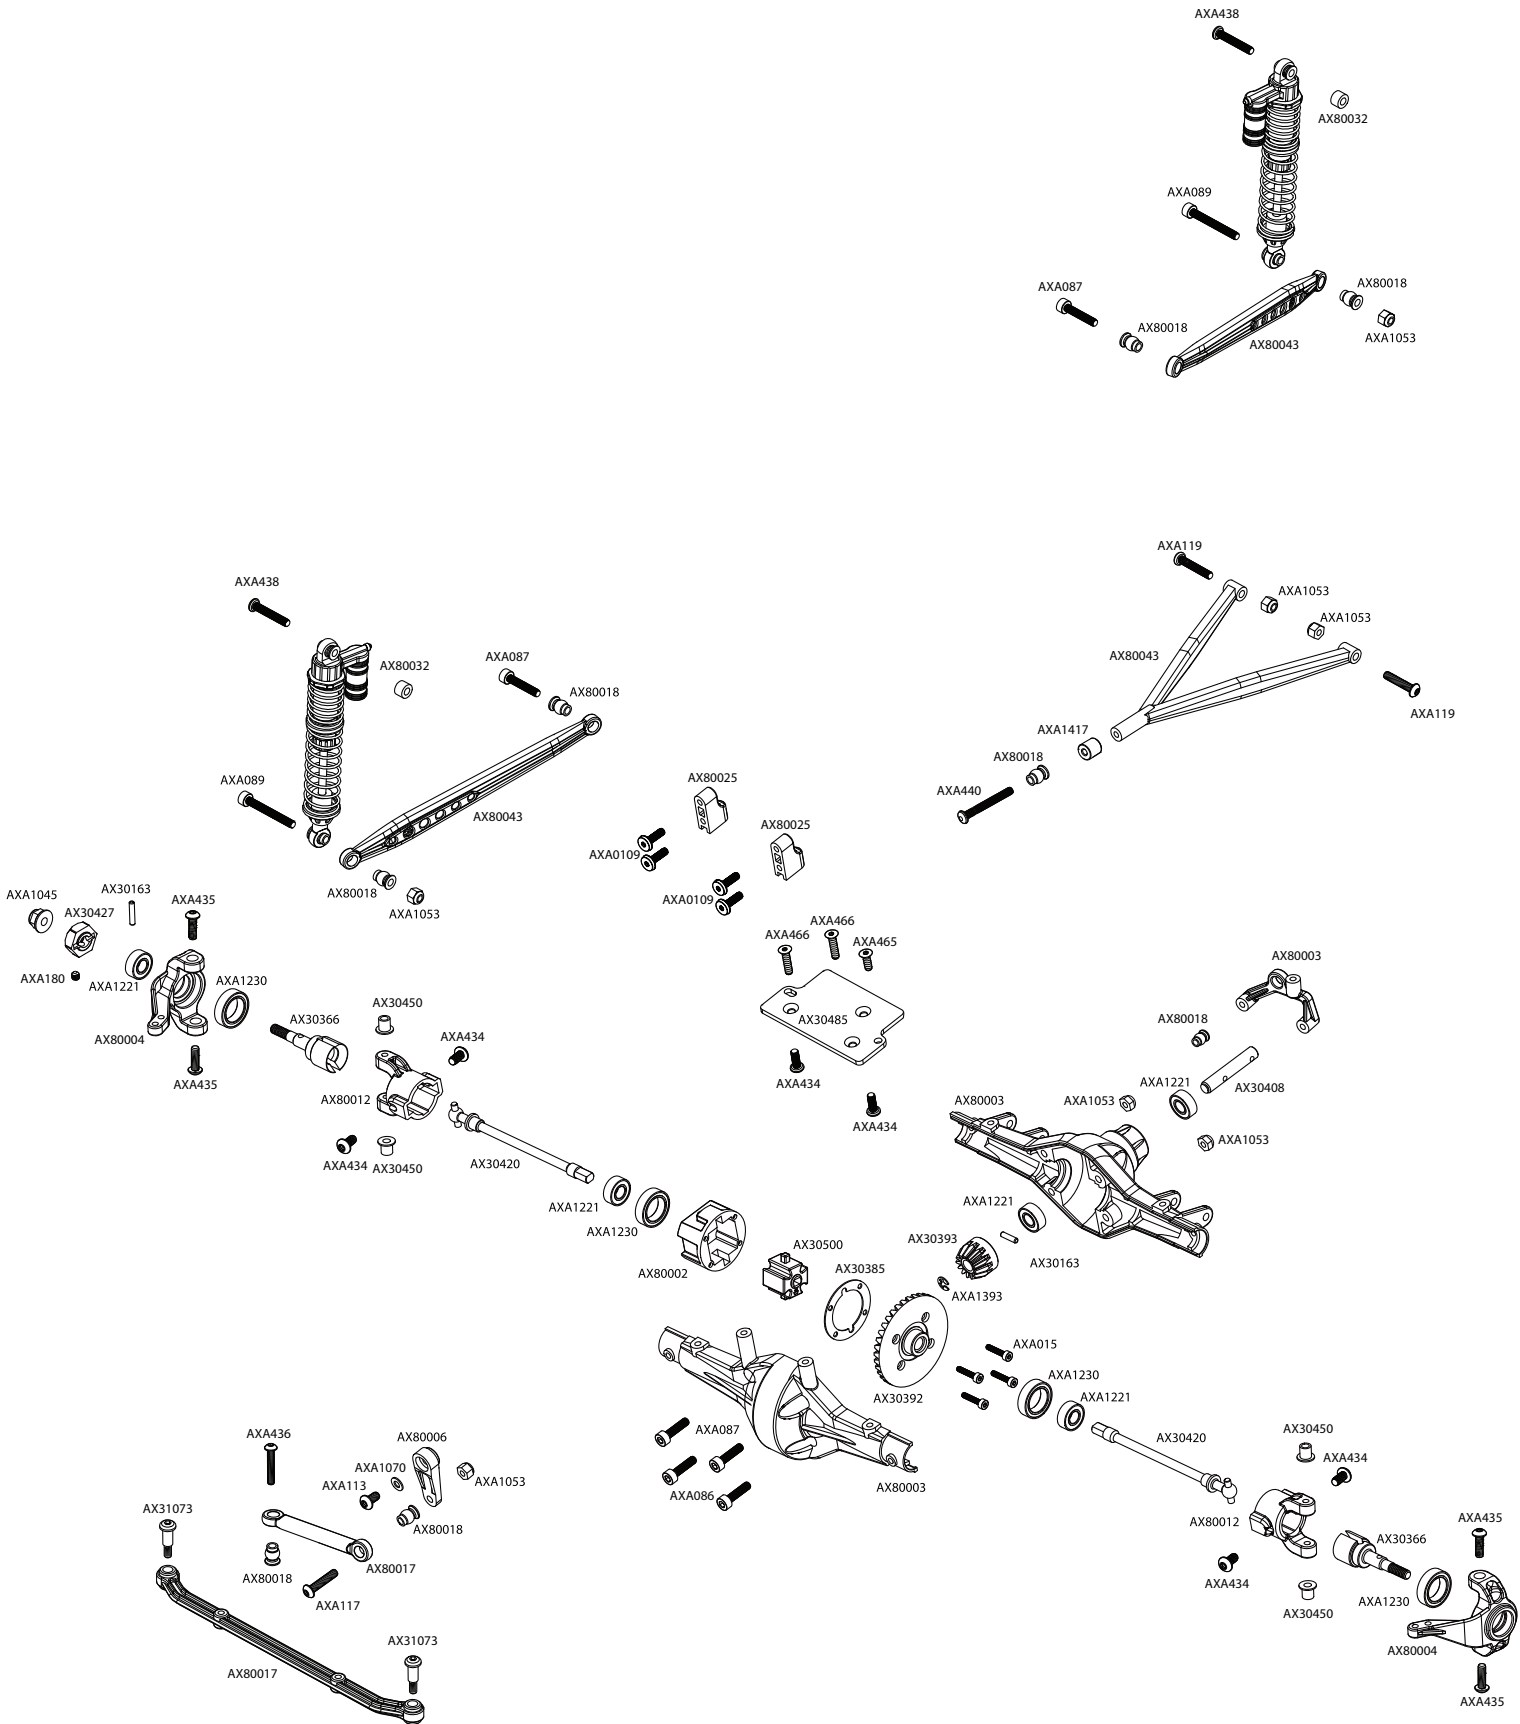

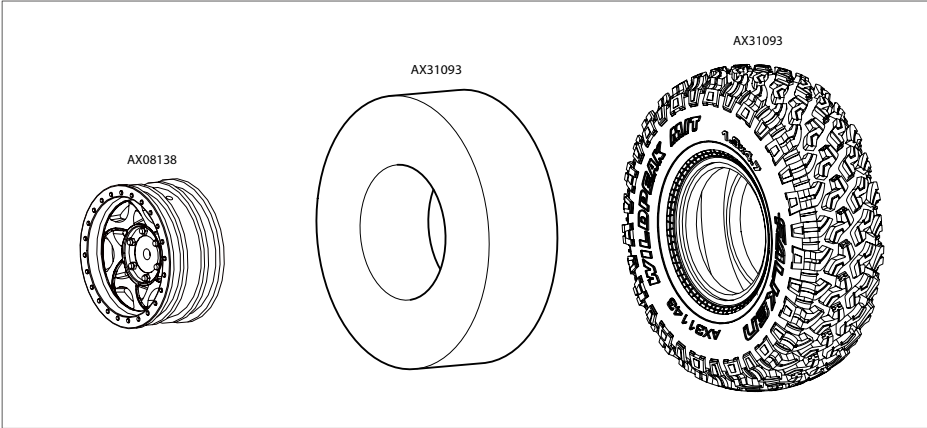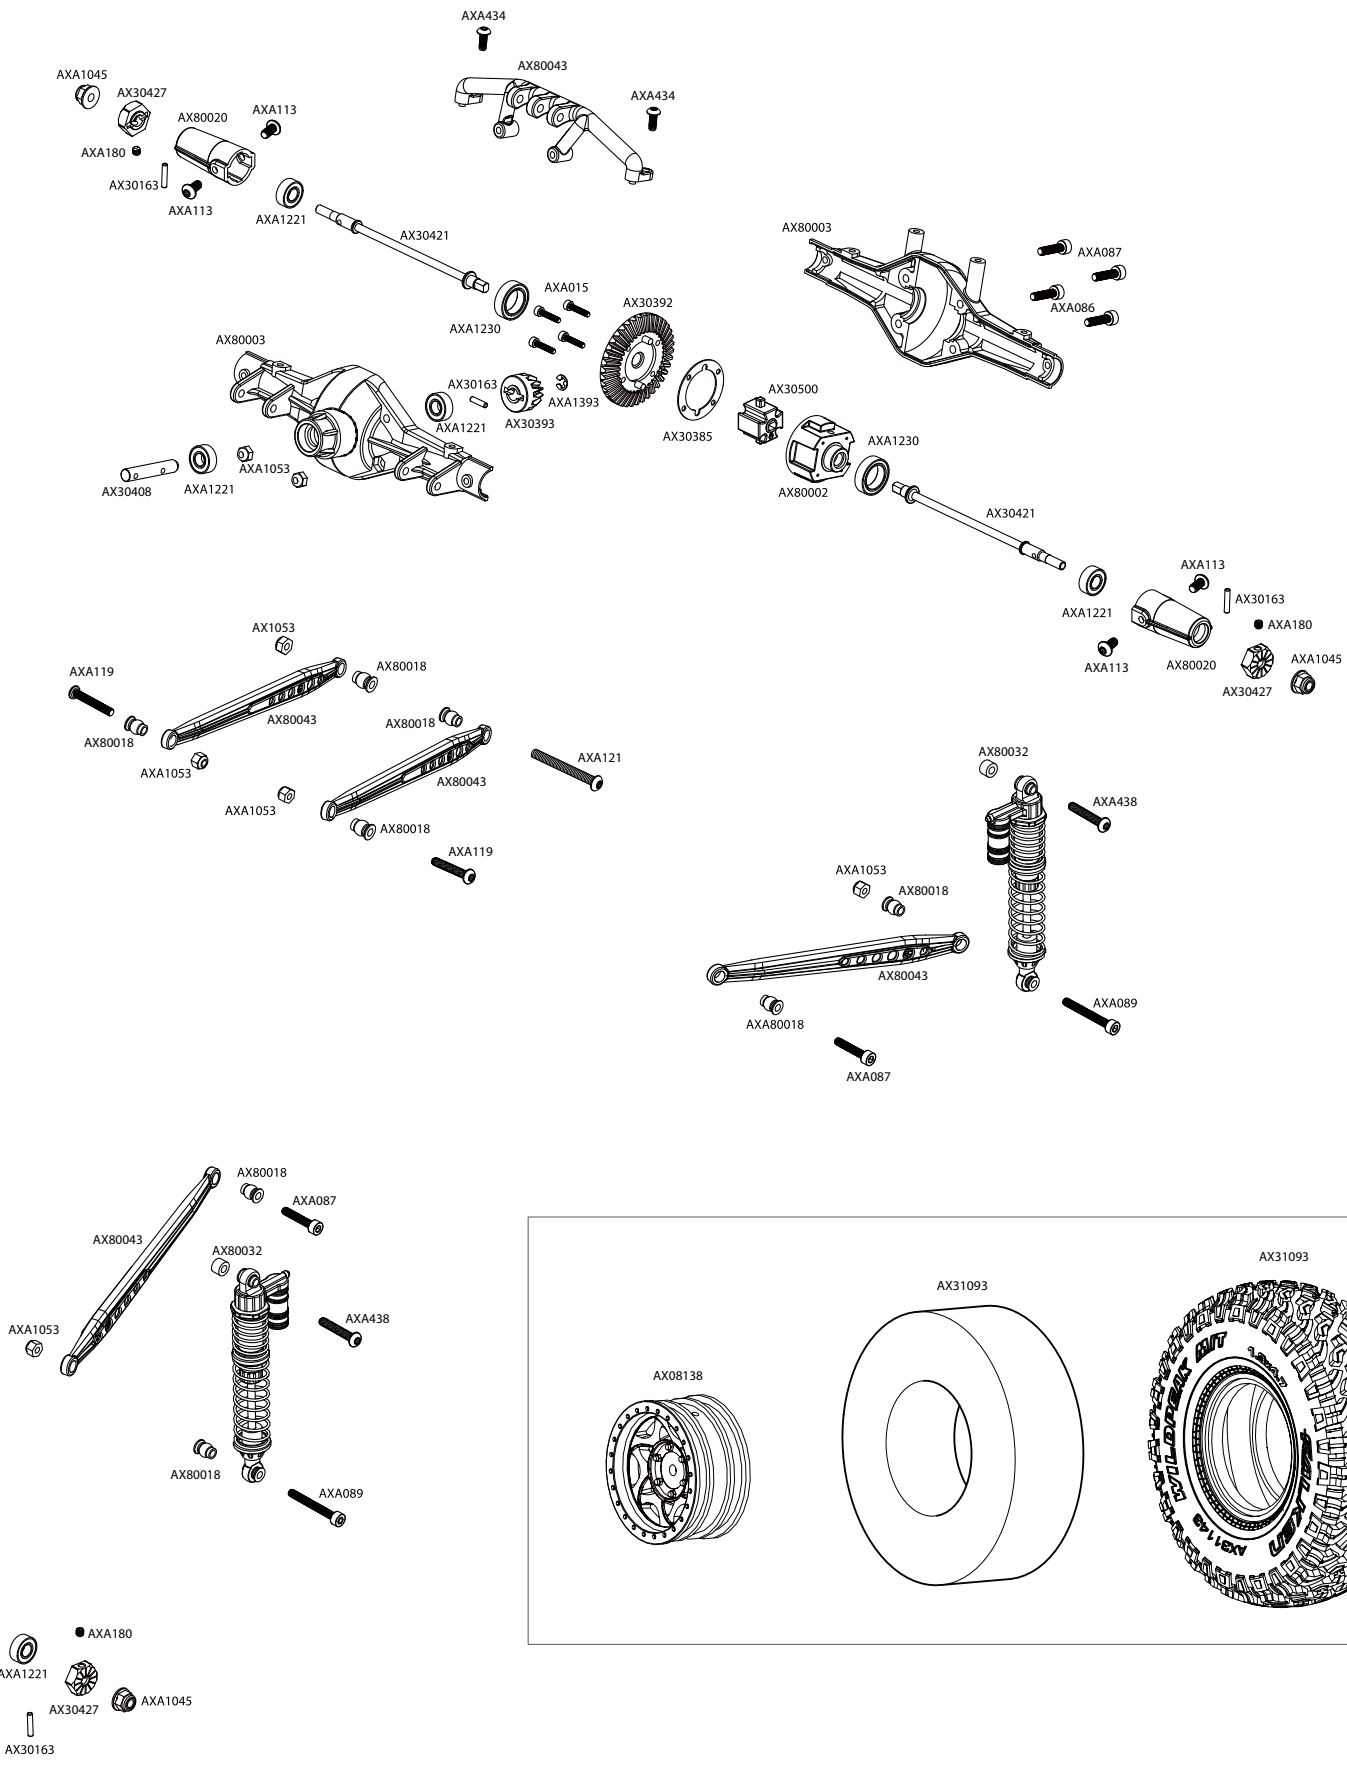

Parts List

Part #	Description	Part #	Description
AX04038	816874012014 Jeep® Wrangler Rock Racer Body - .040" (Clear) - Body Only	AXA0286	816874010874 Screw Shaft M4x2.5x12mm (6pcs)
AX08138	816874010522 1.9 Walker Evans Street Wheel - Black (2pcs)	AXA0414	877493008895 M2.6x10mm Hex Socket Tapping Flat Head (Black) (10pcs)
AX8079	877493006471 Axial Hub Cover Set - Black (4pcs)	AXA0423	816874011390 M2.6x8mm Hex Socket Tapping Button Head (Black) (10pcs)
AX24004	877493004866 Axial 27T Electric Motor	AXA0424	877493009533 M2.6x10mm Hex Socket Tapping Button Head (Black) (10pcs)
AX24206	816874010133 2.4GHz Radio System (2 Channel) (AX-3, AR-3)	AXA0425	816874011765 M2.6x12mm Hex Socket Tapping Button Head (Black) (10pcs)
AX30041	877493004040 Velcro Strap 15x160mm	AXA083	877493004750 M3x6mm Cap Head (Black) (10pcs)
AX30146	877493006518 Shock Shaft 3x50 (2pcs)	AXA086	877493003319 M3x12mm Cap Head (Black) (10 pcs)
AX30162	877493002923 Pin 1.5x8mm (6pcs.)	AXA087	877493003326 M3x16mm Cap Head (Black) (10pcs)
AX30163	877493002930 Pin 2.0x10mm (6pcs.)	AXA088	877493003333 M3x20mm Cap Head (Black) (10pcs)
AX30190	877493002961 Shaft 5x18 (2pcs.)	AXA089	877493003340 M3x25mm Cap Head (Black) (10pcs)
AX30200	877493006525 Spring 12.5x20mm 3.6 lbs/in - Super Soft (Red) - (2pcs)	AXA1045	877493003364 M4 Nylon Lock Nut (Black) (10pcs)
AX30207	877493006594 Spring 12.5x40mm 4.08 lbs/in - Medium (Green) - (2pcs)	AXA1053	877493003388 M3 Nylon Locking Hex Nut (Black) (10pcs)
AX30366	877493002985 Axle 5x35mm (2pcs.)	AXA1059	877493003395 6mm Body clip (Black) (10pcs)
AX30385	877493002992 Diff Gasket 16x25x0.5mm (2pcs)	AXA1070	877493003401 Washer 3x6x0.5 (10pcs)
AX30392	877493003005 Bevel Gear Set (38/13)	AXA114	877493003449 M3x8mm Hex Socket Button Head (Black) (10pcs)
AX30394	877493003739 20T Drive Gear	AXA1163	877493006822 O-Ring 7x1mm (10pcs)
AX30408	877493009663 Input Shaft 5x29mm (2pcs)	AXA117	877493007935 M3x15mm Hex Socket Button Head (Black) (10pcs)
AX30413	877493004439 Slipper spring 8.5x12 165 lbs/in - Black (2pcs)	AXA1179	877493006723 O-Ring 2.5x1.5mm (10pcs)
AX30420	877493003036 Solid Axle Dogbone 6x74mm (2pcs)	AXA119	877493008116 M3x20mm Hex Socket Button Head (Black) (10pcs)
AX30421	877493004651 Straight Axle 6x104.50mm (2pcs)	AXA121	877493008307 M3x30mm Hex Socket Button Head (Black) (10pcs)
AX30427	877493006815 Axial Narrow 12mm Aluminum Hub - Black (4pcs)	AXA1218	877493003470 Bearing 5x10x4mm (2pcs)
AX30435	877493009687 Steel Outdrive Shaft Set (2pcs)	AXA1221	877493003494 Bearing 5x11x4mm (2pcs)
AX30450	877493003067 Flange Pipe 3x4.5x5.5 (4pcs)	AXA1225	877493003500 Bearing 8x16x5mm (2pcs)
AX30483	877493003760 AX10 Scorpion Radio Plate	AXA1230	877493003517 Bearing 10x15x4mm
AX30485	877493003104 AX10 Scorpion Servo Plate	AXA1358	877493003579 Shock Damper 3x7x8 (10pcs)
AX30491	877493004675 AX10 RTR Motor Plate	AXA1392	877493003586 E2 e-clip (10pcs)
AX30499	877493005832 Transmission Spacer 5x6.9x4.8mm - Grey (2pcs)	AXA1393	877493003593 E2.5 e-clip (10pcs)
AX30500	877493004682 Heavy Duty Locker (2pcs)	AXA1417	877493006082 5x6mm Spacer - Grey (6pcs)
AX30502	877493006624 SCX10 Chassis Rail Set (2pcs)	AXA144	877493008093 M3x8mm Hex Socket Flat Head (Black) (10pcs)
AX30724	816874011246 Pinion Gear 32P 13T (3mm shaft)	AXA176	877493007508 Screw Shaft M3x2.5x12mm (10pcs)
AX31026	816874012281 Slipper Plate Washer 33x5x1.5mm (2pcs)	AXA180	877493003616 M3x3mm Set Screw (Black) (10pcs)
AX31027	816874012298 Spur Gear 32P 56T	AXA291	877493004187 M4x4mm Set Screw (Black) (6pcs.)
AX31028	816874012366 Pin 2.0x11mm (6pcs)	AXA433	877493007492 M3x6mm Hex Socket Tapping Button Head - Black (10pcs)
AX31068	816874012373 Slipper Pad 32.8x15.2x1mm (2pcs)	AXA434	877493008079 M3x8mm Hex Socket Tapping Button Head (Black) (10pcs)
AX31073	816874012175 M3x4x15mm Hex Socket Button Head Shoulder Screw - Black (6pcs)	AXA435	877493008062 M3x10mm Hex Socket Tapping Button Head (Black) (10pcs)
AX31114	816874012533 WB8-HD Driveshaft	AXA436	877493008048 M3x12mm Hex Socket Tapping Button Head (Black) (10pcs)
AX31143	816874012267 1.9 Falken Wildpeak M/T - R35 Compound (2pcs)	AXA438	877493008055 M3x18mm Hex Socket Tapping Button Head (Black) (10pcs)
AX31144	816874012311 AE-5 Waterproof Forward/Reverse ESC w/ Drag Brake	AXA440	877493008444 M3x25mm Hex Socket Tapping Button Head (Black) (10pcs)
AX31148	816874012656 WB8-HD Driveshaft Coupler Set	AXA463	877493008192 M3x6mm Hex Socket Tapping Flat Head (Black) (10pcs)
AX31149	816874012274 Slipper Drive Gear Shaft 5x54.50mm	AXA464	877493008185 M3x8mm Hex Socket Tapping Flat Head (Black) (10pcs)
AX80002	877493003135 Diff Case - Small	AXA465	877493008178 M3x10mm Hex Socket Tapping Flat Head (Black) (10pcs)
AX80003	877493003142 Solid Axle Set	AXA466	877493008161 M3x12mm Hex Socket Tapping Flat Head (Black) (10pcs)
AX80004	877493003159 Hub Set	AXA471	877493008130 M3x30mm Hex Socket Tapping Flat Head (Black) (10pcs)
AX80006	877493003173 Servo Set	AX30810	816874010935 EXO™ Universal Joint Rebuild Set (Front or Rear) (2pcs)
AX80009	877493003203 Transmission Set		
AX80010	877493003210 Gear Set		
AX80012	877493003234 C Hub Carrier Set		
AX80017	877493004712 Steering Link Parts Tree		
AX80018	877493004729 Hardware Parts Tree		
AX80020	877493004743 Plastic Rear Axle Lock-out (2pcs)		
AX80025	877493006648 SCX10 Shock Hoops Parts Tree		
AX80026	877493006655 SCX10 Frame Brace Set		
AX80027	877493006662 SCX10 Battery Tray Holder		
AX80028	877493006679 SCX10 Radio Box Parts Tree		
AX80029	877493006686 Shock Cap Parts Tree		
AX80030	877493006693 61-90 Shock Body Set		
AX80031	877493006709 Body Mount Parts Tree		
AX80032	877493006716 Shock Parts		
AX80041	877493007560 1/10th Scale Rock Rails Set (2pcs)		
AX80043	877493007546 SCX10 RTR Links Parts Tree		
AX80078	877493009632 Transmission Spur Gear Cover		
AX80085	816874010638 Universal Mount 5 Bucket Light Bar (Black)		
AX80086	816874010621 Light Bar Lenses (Clear) (5pcs)		
AX80115	816874010836 Light Bar Lens Grills (Axial, PIAA, Un-Marked)		
AX80125	816874011758 SCX10 Poison Spyder JK Brawler Lite Front Bumper		
AX80129	816874012106 Roll Cage Top		
AX80130	816874012113 Roll Cage Sides		
AXA0109	816874012038 M3x10mm Oversized Flat Hex Socket (Black) (10pcs)		
AXA0113	877493009786 M3x6mm Hex Socket Button Head (Black) (10pcs)		
AXA013	877493003265 M2x6 mm Cap Head (Black) (10pcs)		
AXA015	877493003272 M2x10mm Cap Head (Black) (10pcs)		

Option Parts

AX12016	816874010362	1.9 Ripsaw Tires - R35 Compound (2pcs)
AX12019	816874011864	1.9 Maxxis Trepador Tires - R35 Compound (2pcs)
AX24003	816874010096	20T Electric Motor
AX24007	877493005863	Axial 55T Electric Motor
AX24010	816874011703	Brushless 2900KV Electric Motor
AX24251	877493006893	Axial NVS - Night Visions System
AX24252	877493006976	Axial Double LED Light String (White LED)
AX24253	877493006969	Axial Double LED Light String (Red LED)
AX24254	877493006952	Axial Double LED Light String (Orange LED)
AX24255	877493006945	Axial Single LED Light String (White LED)
AX24256	877493007010	Axial 5 LED Light String (White LED)
AX24257	877493007614	Simple LED Controller w/LED lights (4 white and 2 Red)
AX24258	816874010065	4 LED Light String (White LED)
AX24259	877493008451	Axial AE-2 Forward/Reverse ESC w/ Drag Brake
AX24260	816874011055	AE-3 Vanguard ESC
AX30031	877493004033	Antenna
AX30090	877493006877	Axial 61-90mm Aluminum Shock Set - 7mm Piston (2pcs)
AX30103	816874011932	Icon 61-90mm Aluminum Shock Set - 7mm piston (2pcs)
AX30114	877493006853	Axial Hard Anodized Aluminum Shock Reservoir (2pcs)
AX30115	877493006846	Axial Hard Anodized Aluminum Pre-load collar (2pcs)
AX30117	877493006839	Axial Hard Anodized Aluminum Shock Body 10x38mm (2pcs)
AX30130	816874011901	Icon Clear Anodized Aluminum Shock Body 10x38mm (2pcs)
AX30131	816874011918	Icon Clear Anodized Aluminum Shock Reservoir (2pcs)

Option Parts

Part #	Description	Part #	Description
AX30132	816874011925	Machined Shock Piston 7mm - 1.5x3 (4pcs)	AX04032 816874011635 AX10 Ridgecrest Body - .040" (Clear)
AX30200	877493006525	Spring 12.5x20mm 3.6 lbs/in - Super Soft (Red) - (2pcs)	AX04033 816874011857 2012 Jeep Wrangler Unlimited Rubicon™ Body - .040" (Clear) - Body Only
AX30201	877493006532	Spring 12.5x20mm 4.32 lbs/in - Soft (White) - (2pcs)	AX04034 816874011840 2012 Jeep Wrangler Unlimited Rubicon™ Roof - .040"
AX30202	877493006549	Spring 12.5x20mm 5.44 lbs/in - Medium (Green) - (2pcs)	AX04035 816874011833 2012 Jeep Wrangler Unlimited Rubicon™ Body - .040" (Clear) - Complete
AX30203	877493006556	Spring 12.5x20mm 6.53 lbs/in - Firm (Yellow) - (2pcs)	AX04038 816874012014 Jeep® Wrangler Rock Racer Body - .040" (Clear) - Body Only
AX30204	877493006563	Spring 12.5x20mm 7.95 lbs/in - Super Firm (Blue) - (2pcs)	AX80037 877493007379 Interior Details Parts Tree - Black
AX30205	877493006570	Spring 12.5x40mm 2.7 lbs/in - Super Soft (Red) - (2pcs)	AX80038 877493007386 Exterior Detail Parts Tree - Black
AX30206	877493006587	Spring 12.5x40mm 3.6 lbs/in - Soft (White) - (2pcs)	AX80039A 877493007591 1/10th Scale Front Plate Bumper Set
AX30207	877493006594	Spring 12.5x40mm 4.08 lbs/in - Medium (Green) - (2pcs)	AX80039B 877493007584 1/10th Scale Rear Plate Bumper Set
AX30208	877493006600	Spring 12.5x40mm 5.44 lbs/in - Firm (Yellow) - (2pcs)	AX80040 877493007577 1/10th Scale Fender Flare Set (2pcs)
AX30209	877493006617	Spring 12.5x40mm 6.81 lbs/in - Super Firm (Blue) - (2pcs)	AX80041 877493007560 1/10th Scale Rock Rails Set (2pcs)
AX30395	877493004071	Heavy Duty Bevel Gear Set - 38T/13T	AX80044 877493008000 Axial SCX10 Tube Bumper Parts Tree
AX30401	877493006860	Heavy Duty Bevel Gear Set - 36T/14T	AX80045 877493007997 Axial Light Bucket Set (Black)
AX30402	877493006891	Heavy Duty Bevel Gear Set - 43T/13T	AX80047 877493007393 Interior Details Parts Tree - Chrome
AX30426	877493009441	Steering Upgrade Kit	AX80048 877493007409 Exterior Detail Parts Tree - Chrome
AX30437	877493009700	Dig Lockout Shaft	AX80049 877493007973 Axial LED Lens Set - Yellow/Clear (4pcs)
AX30484	877493003098	Transmission Spacer	AX80051 877493009830 Dig Transmission Case
AX30487	877493004125	AX10 Locked Transmission Set	AX80068 816874010218 Dig Linkage Set
AX30488	877493004132	AX10 Locked Axle Set	AX80126 816874011789 SCX10 Poison Spyder JK RockBrawler Rear Bumper and Tire Carrier
AX30489	877493004248	Transmission Spacer 5x6.9x4.8mm	AX8080 877493006488 Axial Hub Cover Set - Satin Chrome (4pcs)
AX30494	877493004880	Aluminum Rear Axle Lockout (2pcs)	AX8087 877493006334 Axial 1.9 8 Hole Beadlocks - Black (2pcs)
AX30495	877493005917	Aluminum C Hub Carrier - Black (2pcs)	AX8088 877493006341 Axial 1.9 8 Hole Beadlocks - Satin Chrome (2pcs)
AX30496	877493005924	Aluminum Knuckle - Black (2pcs)	AX8122 877493006396 Axial 1.9 Beadlock Ring - Grey (2pcs)
AX30498	877493005825	Transmission Spacer - Grey	AX8127 877493006440 Axial 1.9 Rock Beadlock Ring - Grey (2pcs)
AX30516	877493006235	Threaded Aluminum Pipe 6x106mm - Grey (2 pcs.)	AXA1046 816874011994 M4 Serrated Nylon Lock Nut (Blue) (4pcs)
AX30517	877493006242	Threaded Aluminum Pipe 6x33mm - Grey (2pcs.)	AXA1076 816874011437 Cap Head Washer M3x10mm (4pcs)
AX30518	877493006259	Threaded Aluminum Pipe 6x98mm - Grey (2pcs.)	AXA1101 877493003432 Cone Washer 3x6.9x2mm (6pcs)
AX30547	877493008994	1.9 Internal Wheel Weight Ring 43g/1.5oz (2pcs)	AXA1104 877493005443 Cone Washer 3x6.9x2mm - Orange (6pcs)
AX30548	877493009007	1.9 Internal Wheel Weight Insert 9g/0.33oz (4pcs) (for use with AX30547)	AXA1105 877493006020 Cone Washer 3x6.9x2mm - Grey (6pcs)
AX30549	877493008277	SCX10 TR Links Set - 11.4" (290mm) WB	AXA1331 877493003555 Flanged Ball 3x5.8x7mm (6pcs)
AX30550	877493008284	SCX10 TR Links Set - 12.3" (313mm) WB	AXA1412 877493006037 0.5x6mm Spacer - Grey (6pcs)
AX30569	877493009069	Pinion 48P 14T - Steel	AXA1413 877493006044 1x6mm Spacer - Grey (6pcs)
AX30571	877493009076	Pinion 48P 13T - Steel	AXA1414 877493006051 2x6mm Spacer - Grey (6pcs)
AX30572	877493003111	Pinion 48DP 14T	AXA1415 877493006068 3x6mm Spacer - Grey (6pcs)
AX30573	877493009083	Pinion 48P 15T - Steel	AXA1416 877493006075 4x6mm Spacer - Grey (6pcs)
AX30578	877493004699	Pinion 48DP 20T	AXA1418 877493006099 6x6mm Spacer - Grey (6pcs)
AX30665	877493009724	Spur 48DP 80T	AXA1419 877493006105 7x10mm Post - Grey (2pcs)
AX30672	877493003128	Spurs 48DP 87T	AXA1420 877493006112 7x15mm Post - Grey (2pcs)
AX30708	816874012021	AX10 Locked Transmission - Complete Metal Gear Set - Steel (3pcs)	AXA1421 877493006129 7x20mm Post - Grey (2pcs)
AX30709	816874011703	Universal 5 Bucket Light Bar Set	AXA1422 877493006136 7x25mm Post - Grey (2pcs)
AX30793	816874010195	Dig Component Set	AXA1423 877493006143 7x30mm Post - Grey (2pcs)
AX30794	816874010041	WB8 Driveshaft Set (2pcs)	AXA1424 877493006150 7x35mm Post - Grey (2pcs)
AX30834	816874010409	Aluminum Servo Horn 23T	AXA1425 877493006167 7x40mm Post - Grey (2pcs)
AX30835	816874010416	Aluminum Servo Horn 24T	AXA1426 877493006174 7x45mm Post - Grey (2pcs)
AX30836	816874010423	Aluminum Servo Horn 25T	AXA1427 877493006181 7x50mm Post - Grey (2pcs)
AX30860	816874011512	Machined Motor Plate (Hard Anodized)	AXA1428 877493006198 7x55mm Post - Grey (2pcs)
AX4010	877493007621	Axial Dingo Truck Body - .040" uncut (Clear)	AXA1429 877493006204 7x60mm Post - Grey (2pcs)
AX4010R	877493007638	Axial Dingo Truck Body - .040" uncut (Clear) - Body Only	AXA1430 877493006211 7x65mm Post - Grey (2pcs)
AX4025	877493008031	Axial Trail Honcho Truck Body - .040" uncut (Clear) w/ Molded Rear Cage	AXA1431 877493006228 7x70mm Post - Grey (2pcs)
AX4025R	877493008024	Axial Trail Honcho Truck Body - .040" uncut (Clear) - Body Only	

NOTES

DON'T SETTLE FOR *NORMAL BEHAVIOR*

©2013 Axial R/C, Inc. A subsidiary of Hobbico, Inc. All Rights Reserved.



READY TO RUN

**AX10™ DEADBOLT™ 1/10th SCALE
ELECTRIC 4WD #AX90033**

OFFICIALLY LICENSED TECHNICAL PARTNERS:



www.axialracing.com

SCX10

THE OFFICIAL TRUCK OF THE R.E.C.O.N. G6 CHALLENGE™



AWCC 2011



SCX10™ FEATURES:

- > SCALE LOOKS WITH METAL TO MATCH!!!
- > TRUE STEEL C-CHANNEL FRAME
- > SOLID AXLE DESIGN WITH HARDENED STEEL INNER AXLES FRONT AND BACK
- > TRUE RING AND PINION MECHANICAL DIFFERENTIALS
- > COIL OVER SHOCKS
- > STRONG 4X4 TRANSMISSION / TRANSFER CASE ALL-IN-ONE
- > FULL METAL BEARINGS IN AXLES AND TRANSMISSION - RUBBER SEALED FOR MAXIMUM PROTECTION

If you are looking for adventure, the RECON G6 Challenge™ is where it's at. RECON G6 Challenge™ events deliver excitement and push boundaries; always bringing the elements of what a real adventure should deliver - the unknown!

The coolest thing about participating in the G6 Challenge™ is that it is not about the podium, it's all about the finish. It's about the massive amount of drive time and persevering to survive the unknown-uncatched; and then sharing stories at the end of the day - "How in the heck did you clear TM-24 on the 100-course?" "Did you see that Bender-6X walk-it?!" "Did you get passed by the Swanson Swagger!?"

For adventure G6'ers, the rougher and less traveled, the better! It is the adventure of a lifetime for man and scale machine against the elements. The G6 is about battling the course with your comrades, work as an individual or help your fellow G6'ers to overcome the obstacles; survival is the name of the game!

In an adventure, chasing the unknown requires confidence. Confidence = reliability = SCX10™. The Axial SCX10™ - the official truck of the RECON G6 Challenge™!

Visit our blog and start the adventure!



THE SCX10™ MODEL RANGE:



AX90021
DINGO™
KIT (UNASSEMBLED)



AX90022
TRAIL HONCHO™
RTR (READY-TO-RUN)



AX90027
JEEP WRANGLER
UNLIMITED RUBICON
KIT (UNASSEMBLED)



AX90028
JEEP WRANGLER
UNLIMITED RUBICON
RTR (READY-TO-RUN)

© 2013 Axial R/C Inc. A subsidiary of Hobbico, Inc.
Jeep and the Jeep grille are registered trademarks of Chrysler Group LLC and are used under license. ©2013 Chrysler Group LLC.



www.axialracing.com

OFFICIALLY LICENSED TECHNICAL PARTNERS:



EXPLORE

facebook.com/axialinc | twitter.com/axialrc | youtube.com/axialvideos | flickr.com/axialrc



8 GOODYEAR
SUITE 125
IRVINE, CA 92618

AX90036-1001

Jeep and related logos, vehicle model names and trade dress are trademarks of Chrysler Group LLC and are used under license by Axial Inc. © Chrysler Group LLC 2014.

www.axialracing.com