


VOYAGER

REPLACING THE PROPELLER

1. Unplug and remove the LiPo battery.



2. Remove the front bottom of the cowl by cutting through the clear tape on the sides and bottom.



WARNING:
DO NOT cut the tape too deeply!
It could damage the cowl mounting pegs.



3. Pull the lower cowl away from the fuselage.




4. Using long nose pliers to hold the shaft, unscrew the old propeller **counterclockwise**.
5. Remove the spinner (DIDA3069) from the old propeller and glue it to the new propeller using white glue.



6. Screw on the new propeller by holding the shaft with long nose pliers and turning the propeller **clockwise**.

NOTE: The propeller should be screwed onto the shaft fully.

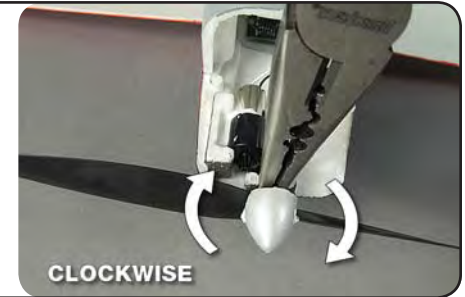

7. Re-attach the foam lower cowl with clear tape.



DROMIDA