





**CARL GOLDBERG PRODUCTS, LTD.**

## **TIGER 2 ARF BUILDING NOTES**

### **ELEVATOR INSTALLATION**

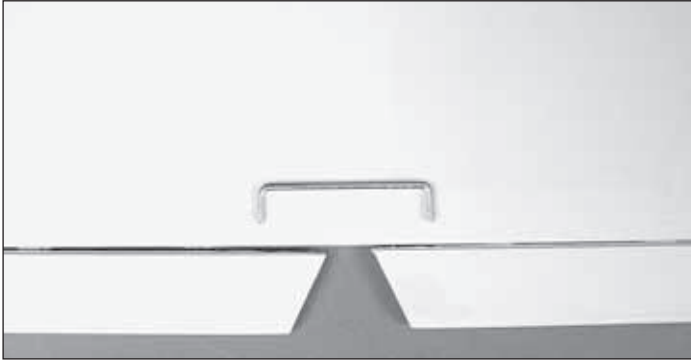

**Step 1.** Before starting on step 10 on page 13 of **Stab & Elevator installation**, it is very important that you complete an additional step. Gather the elevator joiner wire which is packaged with the wing joiner and the 5/16" x 3" wing dowels.

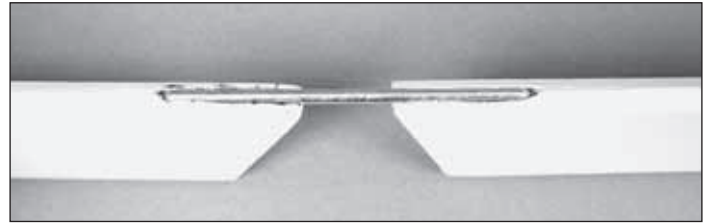

**Step 2.** Using 6-minute epoxy, glue the elevator joining wire into place on each half of the elevator. Make sure to maintain the elevator symmetry during adhesion. This step must be completed before the elevator is attached to the horizontal stab.

### **EYELET OMISSION**

**Step 1.** Please omit the 5/32" eyelets mentioned on page 22 of **Main Gear & Wheel Installation**. They are no longer needed.

### **FUEL TANK**

It is possible that the plane you received has 2 fuel tanks. The slant style fuel tank is what is intended to work with this kit. The rectangular tank will only work in this kit with modification to the firewall. If you only received the rectangular tank please contact product support at 217-398-0007.