

SEQUENCE


F3A XLC ARF 50"

TECH NOTICE

Please follow this procedure for properly installing the canopy hatch. Failure to properly install the hatch could result in the hatch coming loose during flight.




❑ 1. Insert the canopy hatch pins into the holes in the firewall.

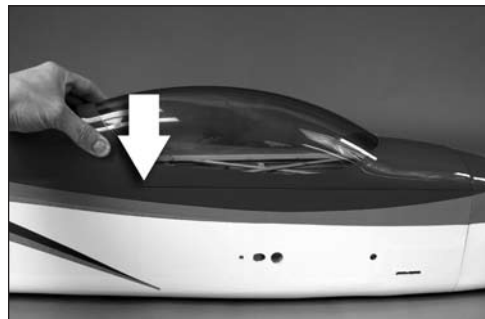

❑ 2. Slide the aft end of the hatch down while aligning the hatch hook tabs in the slots in the fuselage.



❑ 3. With the aft end of the hatch fully seated, slide the hatch forward to engage the hatch hook tabs on the forward edges of the slots.

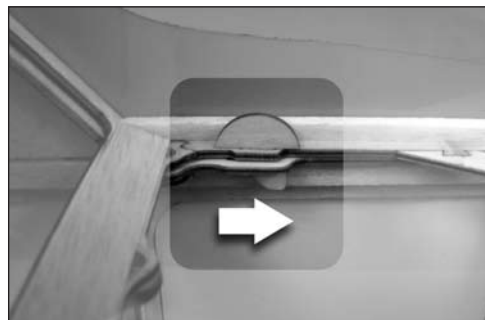

❑ 4. Confirm that both hook tabs are locked into place in the fuselage.

