




Twinstar EP Front Windshield Options

There are two front windshield options for the Twinstar. Use the decal as-is or cut it to match the box.



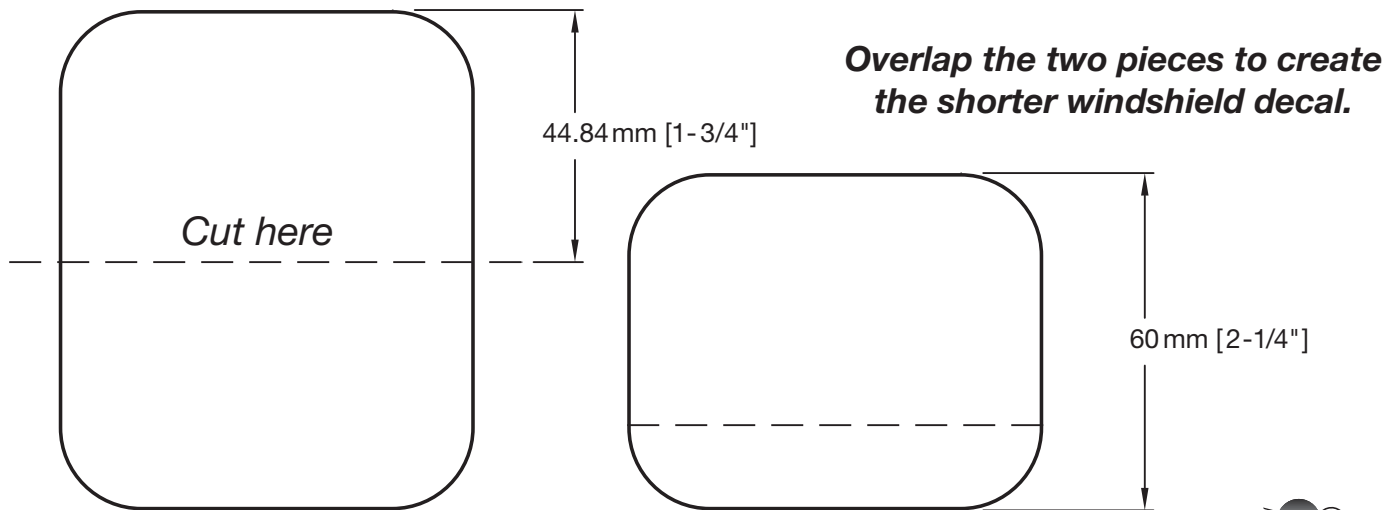


Before installing the nose gear pushrod, it is necessary to install the nose gear pushrod tube (attached with this addendum) into the fuselage.

- ❑ 1. Feed the tube through the steering opening in the firewall.



- ❑ 2. Use your index finger to lift the pushrod tube and slide it through the openings in formers 1, 2, and 3 so it extends to the servo tray.

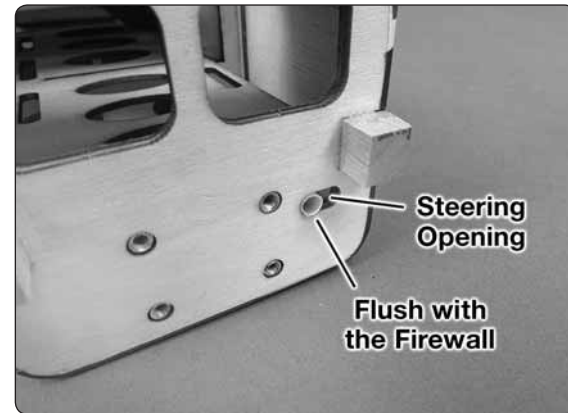

- ❑ 3. When the tube is flush with the firewall it is fully installed. Add medium CA to secure the tube to the formers and firewall (as shown).