


TOPSPEED™

PRODUCT IMPROVEMENT UPDATE


This is a helpful modification you can make to the Top Speed, which will allow easy access to the steering servo.

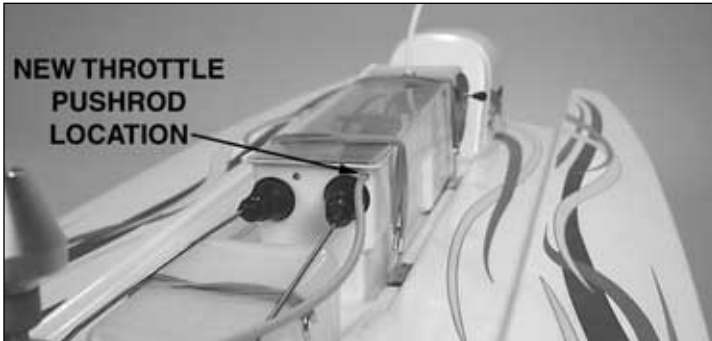

Rerouting of the throttle cable.

1. Remove throttle cable pushrod from carburetor quick connect.
2. Remove throttle cable from servo horn.
3. Remove throttle cable pushrod sleeve from the mount on your particular engine.
4. Pull throttle cable sleeve out of the radio box, being careful not to damage the radio box.

5. Place a piece of tape over the hole that is now open.
6. Remove the wood support that held the pushrod tube.
7. Drill a new 1/8" hole in the upper right hand corner of the radio box near the upper right side of the rubber boot.
8. Insert the pushrod sleeve into the new hole on the right side of the radio box.
9. Reattach the 2½" piece of pushrod sleeve to right hand side of the radio box with thick CA glue.

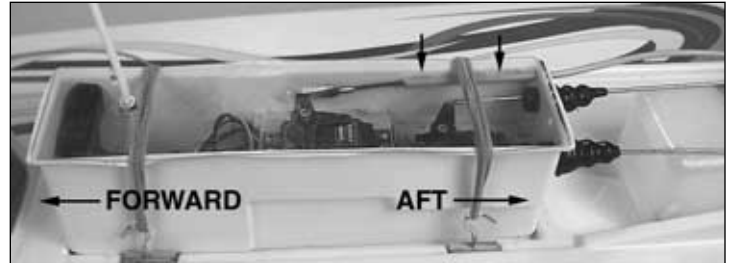

Now the throttle cable exits the radio box on the right hand side allowing easy access to the steering servo and on-board radio gear.



TOPSPEED™

PRODUCT IMPROVEMENT UPDATE


This is a helpful modification you can make to the Top Speed, which will allow easy access to the steering servo.



Rerouting of the throttle cable.

1. Remove throttle cable pushrod from carburetor quick connect.
2. Remove throttle cable from servo horn.
3. Remove throttle cable pushrod sleeve from the mount on your particular engine.
4. Pull throttle cable sleeve out of the radio box, being careful not to damage the radio box.

5. Place a piece of tape over the hole that is now open.
6. Remove the wood support that held the pushrod tube.
7. Drill a new 1/8" hole in the upper right hand corner of the radio box near the upper right side of the rubber boot.
8. Insert the pushrod sleeve into the new hole on the right side of the radio box.
9. Reattach the 2½" piece of pushrod sleeve to right hand side of the radio box with thick CA glue.

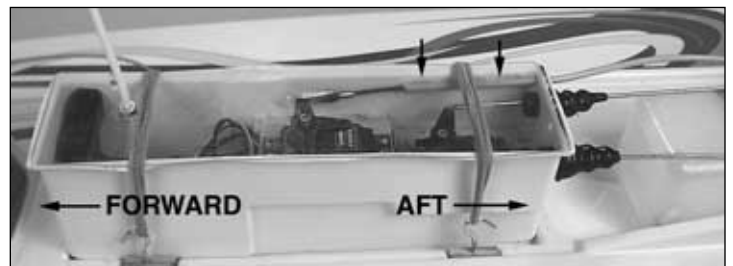

Now the throttle cable exits the radio box on the right hand side allowing easy access to the steering servo and on-board radio gear.

