


## ***HyperFlow EDF Manual Addendum***

### ***Technical Notice***

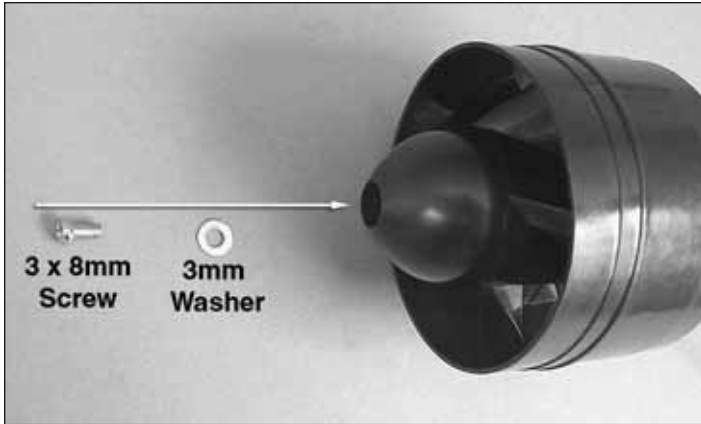

The design of the optional rotor cone has changed slightly. The rotor cone is now secured with a screw rather than glued into place. On page 5, step 4 (brushed motor installation) and on page 7, step 5 (brushless motor installation), the manual refers to installing the fan rotor onto the brass adapter using a 3 x 8mm Phillips screw, 3mm washer, and threadlocking compound. If you plan to install the optional rotor cone (see page 8 of the manual for details), it must first be pressed onto the fan rotor before installing this screw and washer. The 3 x 8mm screw and 3mm flat washer are installed through the hole in the rotor cone, through the fan rotor, and into the brass adapter. Be sure to use threadlocking compound on the screw.