


## SECURING RIMFIRE SET SCREWS AND PROP ADAPTER


*It has come to our attention that the 3mm set screw and the four 3x10mm cap head screws may not be as tight as needed. Please follow these steps to insure prop security.*

1. Remove the spinner cone, prop nut, prop washer, spinner backplate and cowl from the Nexstar EP.

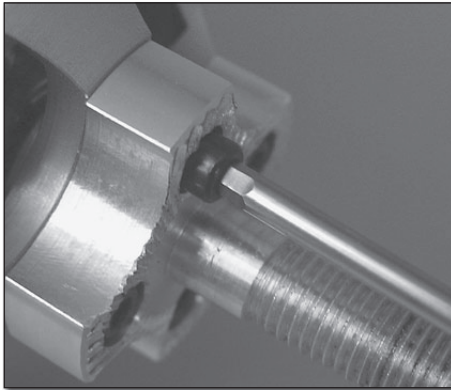


2. Remove the prop adapter by withdrawing the four 3x10mm cap head screws with a 2.5mm hex wrench.

Copyright © 2007

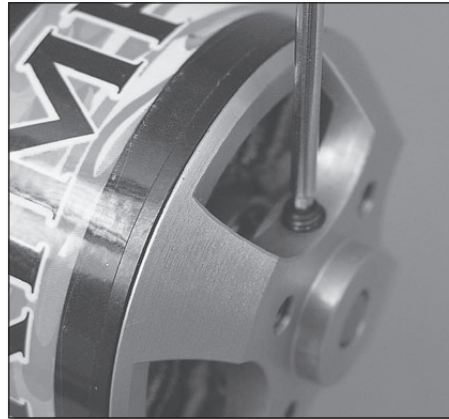

3. Remove the 3mm set screw from the Rimfire with a 1.5mm hex wrench.

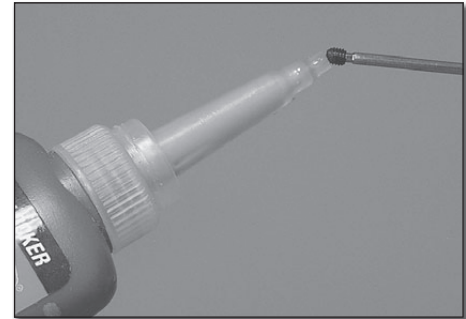

4. For best results, add removable thread locker to the threads on the set screw and reinstall. Repeat this process on the 3x10mm cap head screws and reinstall the prop adapter.

5. Finally, reinstall the cowl, spinner backplate, prop, prop washer, prop nut, and spinner cone.

HCAA09\*\*TECH01