


PRODUCT IMPROVEMENT UPDATE

On pages 12 and 13, steps 14 and 19; The instructions show a Z-bend in one end of the pushrod that is connected to the control horn. The Hobbico® Superstar EP™ ARF now uses a pushrod with an L-bend inserted through the control horn. After the L-bend is inserted through the control horn, slide a 1/16" wheel collar over the pushrod. Thread a 4-40 set screw in the wheel collar and tighten it down on the pushrod.

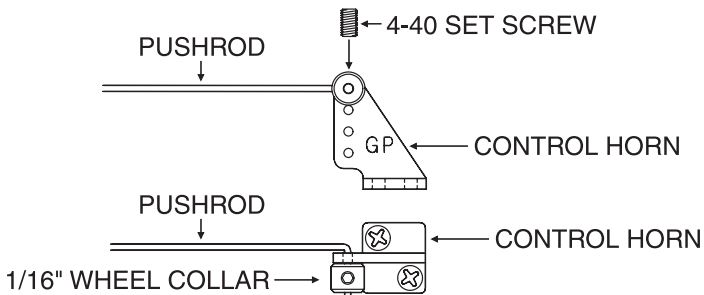

SSEPARFADN02