

## Top Flite B-25 Mitchell ARF Product Improvement


*Please refer to this addendum when you get to the steps in the instruction manual noted below.*

Replace step 4 on page 13 with this step:



4. Place the retract on the rails. With the strut retracted so it will be out of the way, position the retract **all the way back**, then drill four 7/64" [2.8mm] holes for the mounting screws. Mount the retract with four #6 x 1/2" [13mm] Phillips screws.

Perform this step after step 2 on page 25:

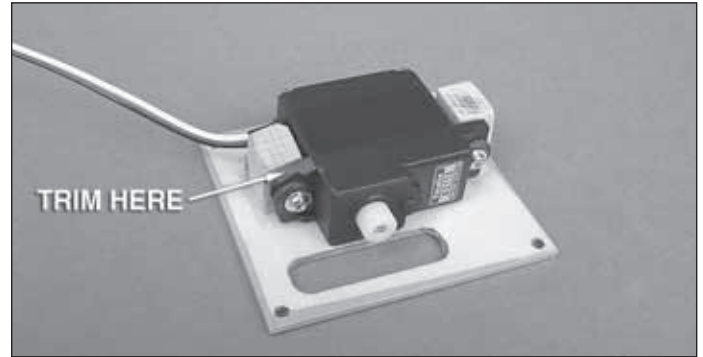

After mounting the rudder servos to the hatches, trim the front mounting tab of both servos as shown so they fit in the hatch without contacting the top sheeting inside.