


2.4GHz Receiver Speed Control Unit

WARNINGS:

- The AquaCraft 2n1 Receiver/ESC unit (AQUB9021) is a direct replacement for the AquaCraft mini boats.
- The 2n1 unit is SLT compatible and can be used with any SLT transmitter.
- The AquaCraft 2n1 unit is **NOT** LiPo compatible. The 2n1 unit is designed to work with a 6-cell 2/3A battery pack (AQP2552).
- The 2n1 unit is designed for use with the AquaCraft 380 motor (AQUG1061).
- Always turn on your transmitter first, and then plug the battery into the 2n1. Always unplug the battery to the 2n1 first, and then turn off your transmitter when finished running.

PREPARATION:

The 2n1 unit comes with a Tamiya battery connector. Solder your motor wires directly to the 2n1 unit wires.

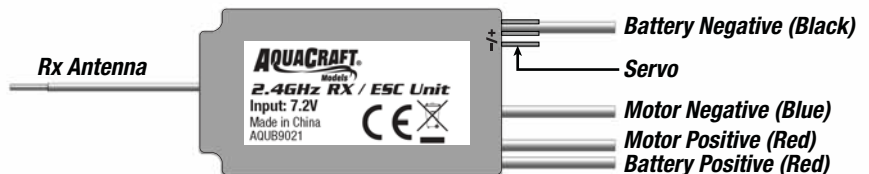

INSTALLATION:

If you are using the 2n1 unit as a direct replacement into an AquaCraft Mini boat you can simply remove the old unit and install the new unit in the same location. If you are upgrading your current system with the AquaCraft 2n1 you will need to determine a good location to mount the unit so that the wires and antenna are clear from any moving parts in the boat. Secure the 2n1 unit into your boat using a quality double-sided tape like DTXR1215 or adhesive-backed hook and loop.

Once the 2n1 unit is installed, connect your rudder servo to the 2n1 unit. Make sure the wires of the servo correspond with the symbols on the label.

LINKING:

The AquaCraft 2n1 is an auto-link system. Turn on your SLT transmitter and then plug the 2n1 unit into the battery and it will automatically link. You may need to reverse your throttle on the transmitter for this to work properly.

ARMING:

To arm the 2n1 unit, turn on the transmitter and then plug the battery into the 2n1 unit. Pull the trigger to full throttle till you hear a faint beep. Then return the throttle to the neutral position and you should hear a faint beep beep. At this point the ESC is armed. You will need to repeat this process every time you use the boat.

SPECIFICATIONS:


Receiver/Speed Control Unit:

Modulation: 2.4GHz FHSS

Input Power Requirement: 7.2V NiMH

Compatibility: 2.4GHz SLT Transmitters

Range: Proximal

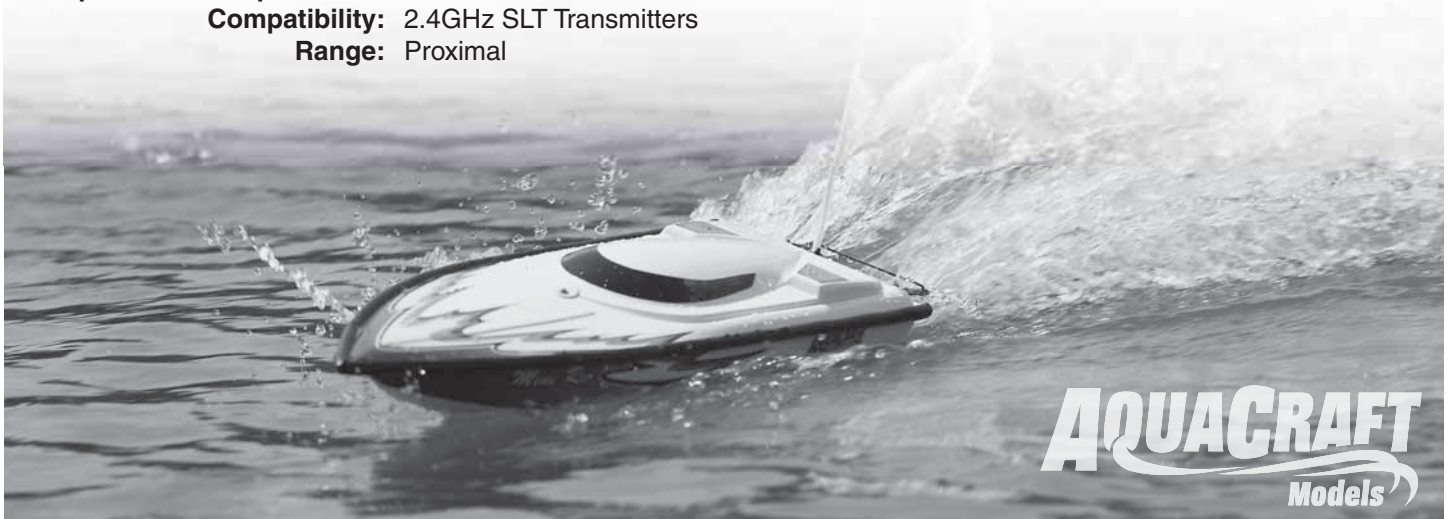

CE COMPLIANCE INFORMATION FOR THE EUROPEAN UNION: **Instructions for Disposal of Waste Equipment by Private Users in the European Union:**

This symbol on the product or its packaging indicates this product must not be disposed of with other household waste. Instead, it is the user's responsibility to dispose of their waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or location where you purchased the product.



Declaration of Conformity:

Product: AquaCraft 2.4GHz Receiver/Speed Control Unit
Item number: AQUB9021

The object of the declaration described here is in conformity with the requirements of the specifications listed below, following the provisions of the European 2006/95/EC Low Voltage Directive:

EN 60950-1:2006+A11:2009+A1:2010+A12:2011 Safety

The object of the declaration described here is in conformity with the requirements of the specifications listed below, following the provisions of the European R&TTE Directive 1995/5/EC:

EN 301 489-1 V1.9.2 General EMC requirements for radio equipment
EN 301 489-3 V1.4.1
EN 300 440-1 V1.6.1
EN 300 440-2 V1.4.1



WARRANTY:

AquaCraft warrants this product to be free from defects in materials and workmanship for a period of 90 days from the date of purchase.

For service on your AquaCraft product if purchased in the **U.S.A. or Canada**, send it postpaid and insured to:

HOBBY SERVICES
3002 N. Apollo Dr., Suite 1
Champaign, IL 61822
Tel: (217) 398-0007 (9:00am - 5:00pm CST, M-F)
E-mail: hobbyservices@hobbico.com

For service on your AquaCraft product if purchased in the **European Union**, send it postpaid and insured to:

Service Abteilung Revell GmbH
Henschelstrasse 20-30
32257 Bünde Germany
Tel: 01805 110111 (nur für Deutschland)
Email: Hobbico-Service@Revell.de

- This product is suitable only for people of 14 years and older. This is not a toy!
- **WARNING: CHOKING HAZARD** - May contain small parts. Keep away from children under 3 years. Please retain packaging for future reference.
- No part of this manual may be reproduced in any form without prior permission.
- The contents of this manual are subject to change without prior notice.
- AquaCraft is not responsible for the use of this product.

Distributed in the EU by Revell GmbH, Bünde Germany