

THE ESSENTIAL EQUIPMENT FOR ALL RC CAR DRIVERS

Power Master World Edition 2



The choice of world champions


MM-CTXP3

World Edition 2


Thank you for your choice!
You have just purchased our brand new 24A (max 30A) Power supply.
Power Master World Edition 2 is available in blue, black or purple versions, it matches those brand colors/colours perfectly- no matter which team you belong to!
Three IFMAR ITC World champions Atsushi Hara, Marc Rheinard and Surikarn Chaidajsuriya are now using Muchmore's Power Master.

FEATURES

Small foot print and light weight design, only for R/C drivers!

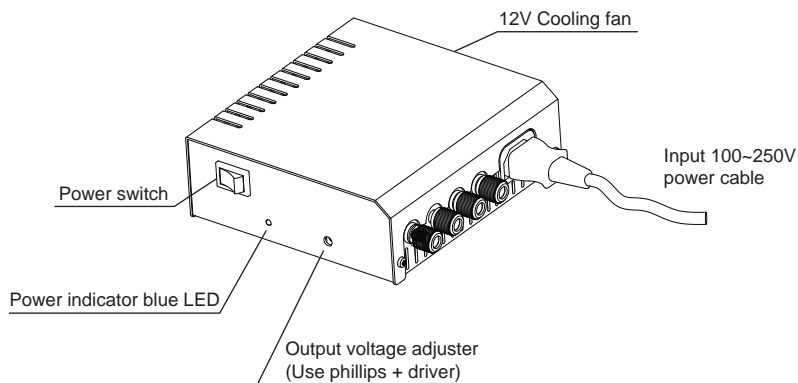

How to connect

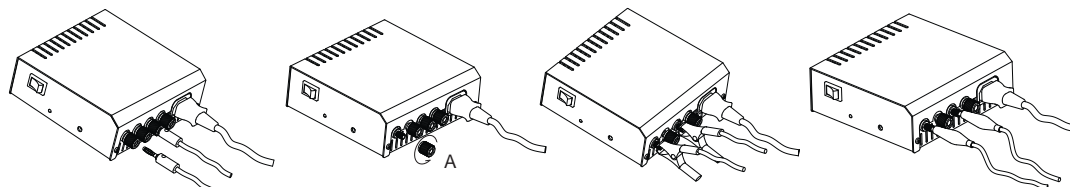

★ European connector ★

Output terminals for european connectors.
Connect RED to +, BLACK to -

★ CB-01 or CB02 Banana Connector (Red & Black) available as extra part ★

★ Big alligator clips ★

Disassemble part 'A' then connect alligator clips.
Make sure clips do not touch each other.

★ Middle size alligator clips ★

NOTE: In case short circuit / heat protector / overload protector activated,
Disconnect all input clips > Power off > Power on and connect input clips after a couple of minutes.

WARNINGS

Do not leave power supply unsupervised while in use.
Do not move the Power supply unit while in use.
Do not operate near water or fire.
Do not operate with wet hands.
This power supply is not intended for use by unsupervised children.
This power supply is designed only for R/C products.
Do not modify or disassemble the Power supply unit.
Do not connect batteries directly to terminals.
In case the Power supply does not work, stop using.
Please read these instructions fully and handle the Power supply correctly.
Connect the plugs tightly, ensure they are not loose.
When you connect plugs, make sure the polarity is correct.
Be careful not to drop the Power supply unit and avoid any kind of impacts.
Unplug AC power cable and turn off the power switch while not in use.
Keep the Power Supply away from heavy vibration, moisture, dust or excessive heat.
Always place the Power Supply on a stable, flat surface.

Product Warranty

MUCHMORE RACING warrants their Power Master to be free from defects in material and workmanship for a period of 120 days from the date of purchase. This warranty applies only to the original purchaser. MUCHMORE RACING (or their associated distributors) will repair or replace without charge, or refund the purchase price of any product which fails during the warranty period by reason of defect in material or workmanship found upon examination by MUCHMORE RACING to have been the cause of failure. This warranty does not cover any failures attributable to abuse, mishandling, failure to follow operating instruction, alteration or accident. To make a claim under this warranty, the purchaser must return the product to MUCHMORE RACING (or the relevant Countries associated distributors) at the address shown right side, properly packed and with shipping charges prepaid. All claims must be made within thirty (30) days from the product failure and, in any event, within thirty (30) days of the expiration of the 120 day warranty. All claims must be accompanied by a sales slip or other written proof of date of purchase. The maximum repair costs for any failure caused by the purchaser are 50% of retail price (original purchase price). Since we cannot supervise the proper use of our products, we can not accept any liability for direct or indirect damage of any type arising from their use or occurring to the property of the user and/or third parties. Therefore, any use of this product shall take place at the user's own risk. The warranty claim may not exceed the value of this product in any case. By putting this product into operation you accept the above conditions and assume full responsibility for use of this product.

Specification

Compact size.....135 x 145 x 50mm
Light weight.....756g
Constant current.....24A
Peak current.....30A/0.5sec
Input.....100~250V (Auto selected)
Adjustable output voltage.....12.0V~16.0V
Perfect for Tire/Tyre truer or Engine starter
Small foot print design
Blue LED status indicator.
New output terminals for European style connectors(CB-01, CB-02 European connectors) and big alligator clips
3 choices of color/colour (Black, Blue or Purple)
Power cable is included.
Overload, short circuit protector
Temperature controlled cooling fan increases its life and keeps it silent when not in use.
Power switch equipped.

Customer Service

Muchmore™

MUCHMORE RACING
127-4, Poongdong, Ilsan-gu, Goyang city,
Gyeonggi-do, 411-842, Korea
TEL +82 31 608 0437 FAX +82 31 608 0437

KOREA...www.much-more.co.kr
JAPAN...www.muchmore.co.jp
UK.....www.much-more.co.uk
USA.....www.muchmoreusa.com